



AST5-CT-2006-030971

ADVICE
Autonomous Damage Detection and Vibration Control Systems

Specific Targeted Research Project

Priority 4 – Aeronautics and Space

Start date: 01/10/2006 – Duration: 45 months

ADVICE Publishable Final Activity Report

Period covered: from 01/10/2006 to 30/06/2010

Date of preparation: 14/10/2010

Project coordinator name: Anne Nawrocki

Project coordinator organisation name: CENAERO

Issue n°: 2.0

Abstract:

This report describes the activities which have been performed, and the results which have been obtained during the full duration of the ADVICE project. It also contains the publishable results of the Final plan for using and disseminating the knowledge.

Document information:

Report leader	A. Nawrocki, CENAERO
Contributor(s)	A. Nawrocki, D. Dumas, CENAERO T. Monnier, INSA H. Boulkenafet, UCL J. Loyer, GOODRICH
Approver(s)	A. Nawrocki, D. Dumas, CENAERO
Status of the report	Approved
Document identifier	ADVICE-FAR-T0.1-CEN-055
Due date	15/08/2010
Issue date	14/10/2010
Dissemination level	PU
Distribution list	EC, ADVICE Consortium
Electronic file name	ADVICE-Publishable-Final-Activity-Report-R2.0.doc

Revision table & Approval status:

Issue	Issue date	Modifications	Approved by (date)
0.1	29/04/2010	Template and instructions provided to WP leaders	A. Nawrocki (29/04/2010)
0.2	20/07/2010	Added contribution from CENAERO, INSA, UCL, GOODRICH	A. Nawrocki (20/07/2010)
0.3	22/07/2010	Consolidation of the report	D. Dumas (22/07/2010)
1.0	12/08/2010	Added section 2 + Final corrections; First issue	A. Nawrocki (12/08/2010)
2.0	14/10/2010	Added general conclusions and identification of WP	D. Dumas (14/10/2010), A. Nawrocki (14/10/2010)

Glossary

ADC	Analog/Digital Converters
AWR	Autonomous Wireless Receiver
AWT	Autonomous Wireless Transmitter
BEM	Boundary Element Method
CLD	Constrained Layer Damping
DI	Damage Index(ices)
FEM	Finite Element Modelling
FFT	Fast Fourier Transform
LW	Lamb Wave(s)
MEMS	Micro-Electromechanical Systems
RF	Radio Frequency
SACLD	Segmented Active CLD
SEM	Spectral Elements Method
SHM	Structural Health Monitoring
SPCLD	Segmented Passive CLD
SSHI	Synchronized Switch Harvesting on Inductor
VDC	Vibration and Damage Control
VDCu	Vibration and Damage Control unit

Table of contents

GLOSSARY	3
TABLE OF CONTENTS	4
1. PROJECT EXECUTION	5
1.1 SUMMARY DESCRIPTION OF PROJECT OBJECTIVES.....	5
1.2 COORDINATOR CONTACT DETAILS.....	8
1.3 CONTRACTORS INVOLVED	8
1.4 WORK PERFORMED AND MAIN ACHIEVEMENTS	8
1.4.1 <i>WP1 – Specifications and requirements</i>	8
1.4.1.1 Objectives	8
1.4.1.2 Methodologies and approaches employed.....	9
1.4.2 <i>WP2 – System design and virtual integration</i>	14
1.4.2.1 Objectives	14
1.4.2.2 Methodologies and approaches employed.....	14
1.4.2.3 Conclusions	16
1.4.3 <i>WP3 – System development and manufacture: Preliminary tests</i>	17
1.4.3.1 Objectives	17
1.4.3.2 Methodologies and approaches employed.....	17
1.4.3.3 Conclusions	22
1.4.4 <i>WP4: Integration & Validation – safety & reliability assessment</i>	23
1.4.4.1 Objectives	23
1.4.4.2 Methodologies and approaches employed.....	23
1.4.4.3 Work performed and end results.....	24
1.4.4.4 Degree to which the objectives were reached.....	33
1.4.4.5 Conclusions	34
1.4.5 <i>General conclusions</i>	34
2. DISSEMINATION AND USE – PUBLISHABLE RESULTS	36
2.1 PROJECT AND RESULTS OVERVIEW	36
2.1.1 <i>Project summary</i>	36
2.1.2 <i>Overview of main project results</i>	37
2.2 DESCRIPTION OF EACH PUBLISHABLE RESULT	38

1. Project execution

1.1 Summary description of project objectives



Title:	Autonomous Damage Detection and Vibration Control Systems		
Acronym:	ADVICE		
Contract Nr.:	AST5-CT-2006-030971		
Total Cost:	3.072.456 €	EU Contribution:	1.758.028 €
Starting Date:	01/10/2006	Duration:	45 months
Web-site:	www.advicE-project.eu		

Background

The ADVICE project is a multidisciplinary research project that aims at the development of state of the art technologies for structural health monitoring and vibration damping in aeronautical structures. Bringing together different research activities in one common project will drive new synergies that can lead to new possibilities for aircraft design, maintenance and cabin environment concepts.

Structural health monitoring

Maintenance and service life evaluation has always been a concern in the aeronautical industry. Over the past century, the approach taken by manufacturers has evolved from safe-life static designs to fail-safe, then damage tolerant, allowing an overall reduction of the weight of the structure, increasing its performances and better predicting the possible failure mechanisms. Maintenance takes an important part when certifying the airworthiness of an aircraft. Regular overhaul and various inspection techniques range from visual inspection to Eddy Current and Fluorescent Penetrant Inspection. They are required to follow the evolution of the integrity of the structure.

The industry is now turning its attention to a new approach to increase the reliability of an aircraft and reduce the time it must spend in maintenance: Structural Health Monitoring. SHM aims at continuously tracking the state of the structure to record any changes in behavior and give out a warning when a situation is identified as potentially threatening (using threshold values, neural networks, user interfaces...). This domain of research has been described as a promising upcoming technology, but still requires the development of new integrated approaches to be available for use on aircrafts.

Vibration damping

Focus is also set on vibration damping in aircrafts. Reducing vibration levels in the structure can have an impact on the service life and maintenance requirements in structures. Fatigue is often the source of

unexpected failure or crack propagation in parts and vibration damping can have an impact on the amplitude of vibration at a local level, which can increase, in an optimistic case, the average time allowed, and at least increase the safety factor between maintenance checks in some parts.

Energy harvesting

In direct link with both previously cited research areas is energy scavenging, that is a growing area of research due to the increase in demand for micro-sensors. The devices that can be developed for health monitoring and vibration damping sometimes need to be placed in remote or hidden areas and renewable energy sources must be sought out to provide the necessary power for their proper use. Mechanical vibrations are one of the possible sources of energy. Thanks to the creation of ultra low power devices and new energy storage and energy management techniques, new solutions can be proposed to create autonomous sensors forming a distributed network, harvesting vibration energy available in the structure.

These three research areas are at the basis of the developments foreseen in the ADVICE project

Project objectives

The objective of ADVICE is to design, model, develop and validate a smart wireless network of self-powered devices that can be used for simultaneous damping of structural vibrations and detection of damage in airplane and helicopter structures (named further as VDCu – Vibration and Damage Control unit).

Indeed, most of the systems developed so far require separate wiring arrangements for power supply and data transmission, thus, contributing to further cabling proliferation. That is why one of the major objectives of the proposed project is to design systems that harvest energy from adjacent zones of the structure and use radio waves for data transmission.

We can identify three categories in the scientific objectives of the project:

1) Development of a Vibration and Damage Control unit:

- Development and optimisation of the self-powered standalone Synchronized Switch Damping and Harvesting (SSD or SSH) system. The objective is a 30% increase of the damping and harvesting performance.
- Development of the couple SSD - Segmented Constrained Layer system using either
 - the piezoelectric patch of the SSD device as constraining layer or
 - The SSH system as energy harvesting system supplying power to the SACL D system.
- The objective is a significant increase of the damping performance compared with the standalone self-powered SSD device, ideally approaching the performance of the externally powered Segmented Active Constrained Layer Damping device.
- Development of a smart Power Management module with on-chip energy converter operating under harsh environment, based on the Silicon On Insulator (SOI) technology.
- Development of a low power Lamb Wave transducer powered by the vibrations of the structure.
- Development of a non-intrusive, low power RF transmission module for VDCu identification with a communication distance of up to 3 meters.
- Optimisation of the interfaces between the piezoelectric devices and the composite substrate and fatigue analysis.
- Development of a numerical tool for the design, selection and characterization of the piezoelectric / composite interface.
- Development of a numerical tool for the optimum positioning of the VDCu's w.r.t. vibration damping, damage detection and signal quality.
- Prediction of the effect of the presence of the Vibration and Damage Control unit on the vibration of the structure (amplitude, frequency, mode shape).

2) Development of a smart network

- Development of the network algorithm based on the popular AODV (On Demand Distance Vector Routing) algorithm.
- Development of network management tools and APIs for the sake of reliability and ensure the collection of data.
- Development of the network nodes, routers and gateways with the sake of minimum energy consumption.

3) Damage identification and damping performance

- Development of novelty detection and pattern recognition algorithms for the determination of the damage signature / index.
- Development of a user friendly interface for data analysis with dedicated hardware.
- Numerical prediction of the damage evolution in the composite plate and prediction of the expected damage signature and mechanical response in terms of vibrations for the safe and damaged part.
- Extension and improvement of an existing numerical tool.

Description of the work

The work plan is divided into six related work packages overlapping in time:

- WP0 is dedicated to project management and risk registration.
- WP1 is mainly concerned with specifications: specification of the target applications, definition of the basic and performance requirement, specification of the test applications. It also includes an exhaustive technological and economical review.
- WP2 contains the design of the VDCu, of the network and of other hardware & software. WP2 is also concerned with the definition of measurement / SHM strategies.
- WP3 consists in the development & manufacture of the system. Note that the network is implemented with dummy VDCu's. Finally, WP3 leads to the delivery of recommendations for SYSTEM integration.
- WP4 is concerned with the integration, reliability & safety assessment, testing and validation of the system. The damping and detection efficiency of a set of 2 to 4 VDCu's on a simple structure is validated.
- WP5 deals with the dissemination and exploitation of the results.

Expected Results

The main goal of the ADVICE project is to demonstrate the feasibility and the efficiency of a distributed autonomous wireless network of VDCus. Aside from the final demonstrator that will be a direct result of all the developments, there is a series of important expected results during and after the completion of the project.

The first expected achievement is a review of the current technologies, research and regulations in the different areas covered by the ADVICE project. A compilation of different possible target applications for medium to long term implementation is equally expected. It is also foreseen to contribute in the establishment of new regulations for vibration damping and structural health monitoring in aircraft structures. This project plans to participate in the development of a general approach to bring new technologies to the aeronautic industry.

New tools are expected to be developed by different partners in the project. May it be for damage detection (INSA, CENAERO), ultra-low power management (CISSOID), energy harvesting (INSA), vibration damping (PROTOS, AERNNOVA) wireless sensor networks (UCL), testing of SHM technologies (GOODRICH).

It is in the consortium objectives to increase the maturity of such a system keeping as long term objective an exploitable industrial application to be further developed after completion of ADVICE through a first, fully functional, Vibration and Damage Control unit for aircraft and helicopters. The ADVICE consortium members, consisting mainly of small and medium sized companies, share a strong interest in marketing ADVICE results. In fact, none of these companies would embark in such a costly technology development project, if there would not be clear exploitation and marketing plans behind this approach.

1.2 Coordinator contact details

Coordinator:

Organisation: Centre de Recherche en Aéronautique, ASBL (CENAERO)
Rue des Frères Wright 29
Bâtiment Eole – 1^{er} étage
B-6041 Gosselies

Contact: Dr. Anne Nawrocki
Tel.: +32 71 91 93 30
Fax: +32 71 91 93 31
E-mail: anne.nawrocki@cenaero.be

EC Officer: Remy Denos
Tel: +32 2 29 86 481
Fax: +32 2 29 66 757
E-mail: remy.denos@ec.europa.eu

1.3 Contractors involved

CENAERO	BE
CISSOID	BE
EADS	DE
AERNNOVA	ES
GOODRICH	FR
IAI	IL
INSA Lyon	FR
PROTOS	ES
PZL	PL
UCL	BE

1.4 Work performed and main achievements

In what follows, the work performed over the full duration of the project as well as the main achievements of ADVICE are summarized at the workpackage level.

1.4.1 WP1 – Specifications and requirements

1.4.1.1 Objectives

The content of Work Package 1 dedicated to the elaboration of specifications and requirements was completed over the first two years of the project. It regrouped all the disciplines as well as all the partners of the project. Work was divided into 5 main axes:

- **Target applications and performance requirements:** In order to understand possibilities in terms of energy harvesting, damage detection, vibration damping,... It was necessary to define several cases in which this system would show potential application and identify the conditions in which the system would operate.
- **Technological, theoretical and regulations reviews:** to explore the current state of the art in different fields, know about existing patents, ongoing research and key aspects the project could focus on.

- **Test structure design and simulation:** in accordance with the different target applications defined, a representative structure that would be used for the proof of concept of the ADVICE system needed to be designed and studied using numerical tools.
- **Vibration control and damage strategy:** Based on current knowledge, define how the system could operate in order to maximize chances of success of different objectives.
- **Requirements of the system:** Pre-design leading to the components characteristics and the estimated performance of the selected technologies.

Being the main starting point of the project and of the developments the ADVICE project would lead to, it was essential for all partners to have or reach a good understanding of:

- The needs of each partner in terms of inputs and outputs to produce.
- The challenges bound to the development of an autonomous wireless system for aircraft applications.
- The state of the art in the different fields in relation with the ADVICE project.
- Ways to prioritize and make technologies work together to reach a feasible solution that could be used as a proof of concept.

Most of the objectives of this work package were reached through collaborative participation to the elaboration of the deliverables.

1.4.1.2 Methodologies and approaches employed

The first task dedicated to the description of different target applications and performance requirements involved two different aspects. In the first, the different end-users of the project (Aernnova, EADS-IWG, IAI and PZL) defined possible applications on aircraft and helicopter structures for the ADVICE system and collected information useful for the identification of operating conditions, performance and possible benefits of the system for the structure. These target applications included structures such as:

- A Vertical stabilizer at the extremity of the tail boom of the PZL SW-4 multipurpose helicopter: This part undergoes important levels of vibration and high stress levels near the fixation points.

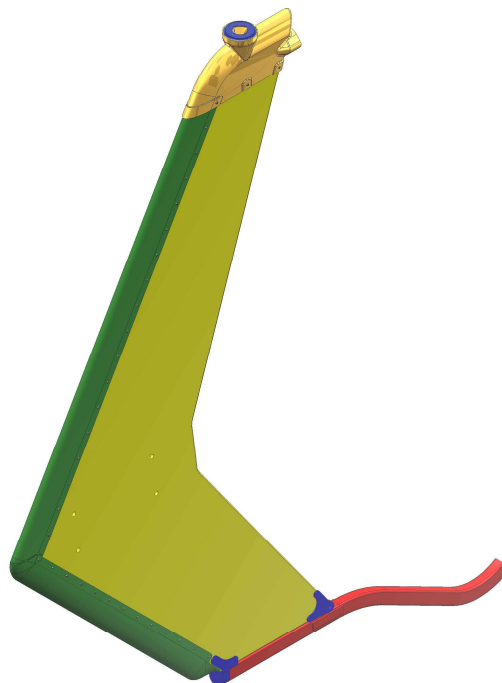


Figure 1: Target application 1 – Helicopter vertical stabilizer

- A leading edge of a G150 regional business jet: fixed complex shape made up of composite and metallic components undergoing pressure loads.

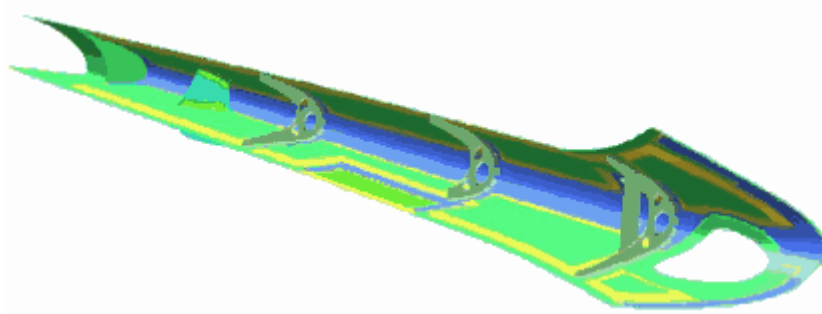


Figure 2: Target application 2 - Leading edge of a regional jet

- The inboard flap of a regional jet: moving carbon fiber composite/metallic part made up of three cells, one of which is filled with a rohacell foam.

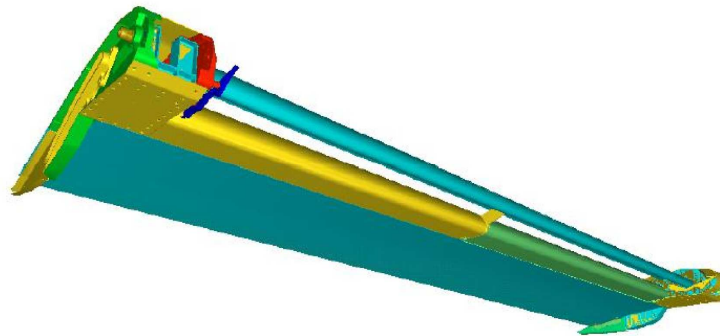


Figure 3: Target application 3 – Inboard flap

- Fuselage panel/door: stiffened composite or metallic structure presenting a large pressurized surface with interest for vibration damping in terms of acoustic comfort.

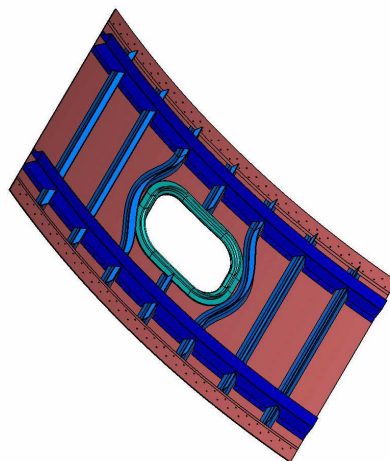


Figure 4: Target application 4 – Composite/Metallic fuselage panel

Information related to these structures included static pressure load distribution for the leading and trailing edges, vibration amplitudes for the fuselage and the vertical stabilizer, material definition and properties and sometimes the requirements in terms of detectability of damage. Performance requirements were taken from different regulation document or handbooks such as RTCA/DO-160D, MIL-HDBK-17-3F or MIL-STD-810-E.

The second aspect of this task focused on the prediction of the structural response of these parts through finite element modelling, first to have the modal characteristics of the parts (frequencies and shapes) and secondly to check the feasibility of Lamb wave inspection in these complex parts. Despite the high complexity of these parts, some results on Lamb wave propagation were obtained, showing several important elements.

First, care has to be taken to study the attenuation of the wave through the material in order to ensure that a signal with large enough amplitude will reach the sensors placed on the structure. Cases showed that over a distance of roughly less than a meter, the signal perceived at the sensor was less than 1% of the amplitude of the signal emitted.

Also, changes in structure properties, such as thickness or materials can have an impact on the propagation of such waves. In the figure below, the separation between two zones of different thickness is clearly visible, changing not only the amplitude of the signal, but also the wavelength. Lamb waves are dispersive, leading to changes in propagation speed too.

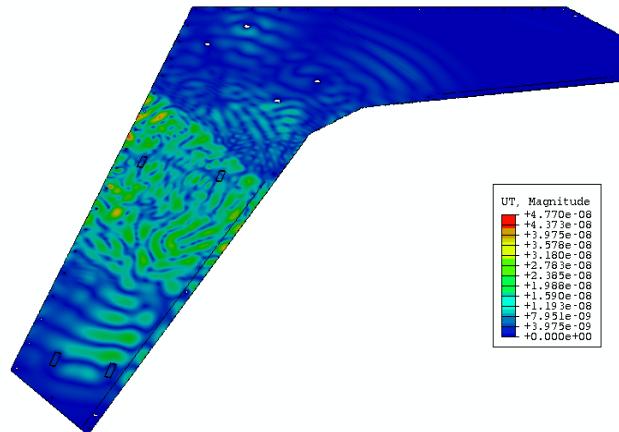


Figure 5: Lamb wave propagation in a vertical stabilizer panel

Only a limited amount of effort was put in this simulation task as Lamb wave propagation and signal processing was not mature enough to directly exploit results on a complex structure. Instead, work was focused on understanding the physics and interaction with damage on a more simple structure.

Finally, this task also was also dedicated to predicting the energy levels that would be available on the test structure. This also turned out to be a challenging task not only to find relevant information to characterize vibration levels that were going to be useful for piezoelectric energy harvesting, but also to quantify the strain in the structure as this depends on the location at which the harvesting unit will be placed.

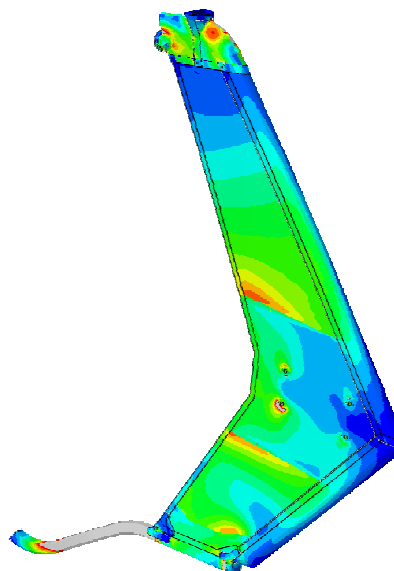


Figure 6: Strain distribution of a vertical stabilizer under vibrating loads

The second task consisted in collecting current documents, searching for new available sources and summarizing the overall knowledge in relation to the subjects covered by the project. The contribution of each partner took the form of a review structuring results of research, a list of bibliographical references and, if available, a copy of these documents to make them available to other partners in the context of the work done on the project.

The subjects covered by each partner are found in the table below.

	C E N A E R O	C I S S O I D	D D L	E A D S - C R C	A E R N O V A	G O O D R I C H	I A I	I N S A - L Y O N	P R O T O S	P Z L	U C L
Energy Harvesting								X			
Energy storage devices		X									
Low power RF transmission											X
RF networks											X
Vibration damping technologies					X			X	X		
SHM with Lamb Waves and damage index	X							X			
Numerical methods for simulation of Lamb Waves	X										
Measurement strategies			X			X					
Adhesive bonding of piezoelectric patches on structures	X										
Impact on maintenance cost and program					X	X	X				
Regulations on embedded vibration damping devices				X							
Regulations on embedded monitoring in composite structures			X								
Regulations on RF pollution							X				
Regulations on real monitoring of structures					X						
Anterior development of similar systems	X			X	X		X			X	

All contributions were assembled and organized to form one structured document. The lists of bibliographical references were collected in a database in order to simplify their use for the report and also for other documents. A few numbers describing the review work done during this task are given:

- 126 pages
- 424 references
- 165 documents available on the portal or accessible through external web links

In order to define a structure on which the system could be tested, partners involved in the third task used data coming from the different target applications to choose suitable materials, damage types and test configurations. An important element in the definition of this structure was to have similar behavior in terms of vibration characteristics (frequencies, response to solicitations, boundary conditions,...) to be able to characterize the vibration harvesting and damping with a wide band frequency response. This led to the design of a square composite reinforced panel with a set of different possible boundary conditions.

Simulations were again done with two different objectives:

1. Evaluate the optimum position for vibration harvesting and damping and estimate the energy levels that could be achieved depending on the vibration loading on the panel
2. Predict the propagation of Lamb waves in an orthotropic composite structure and the ability to detect changes in the signal propagation due to local damage.

These two objectives were achieved allowing to find the best position for piezoelectric patches for harvesting functions as well as evaluating the impact on the Lamb wave of different parameters.

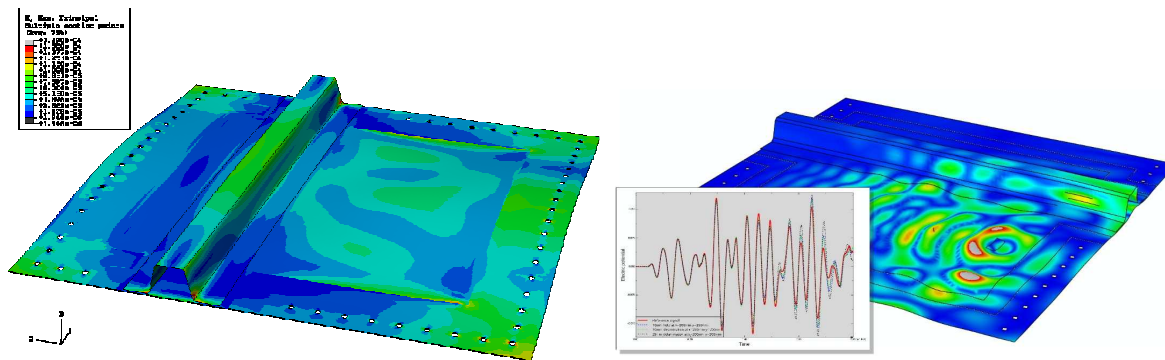


Figure 7: Numerical simulations of strain distribution under random vibrations and Lamb wave propagation in the ADVICE test structure

a) Strain distribution in the panel undergoing random vibration b) Lamb wave propagation and effect of different damage types.

The two other tasks in this work package were dedicated to the design of the system through the development of a VDC (Vibration and Damage Control) strategy and the requirement of the system. These tasks involve much interaction between the different partners in order to take all the specificities of different technologies into account. This would later help the feasibility check during the testing phase of the project.

The strategy was quickly dictated by the energy requirements of the system and the fact that the energy levels available were not of large magnitude. The approach taken was to keep define the VDCu as the Lamb wave emitting unit (that would be autonomous) and the end-node (Lamb wave receiver) would be externally powered. Depending on the energy balance, the option of making the end-node autonomous would only require to add the harvesting capabilities to this unit. Below is a representation of how the VDCu and end-node/Router were designed to work.

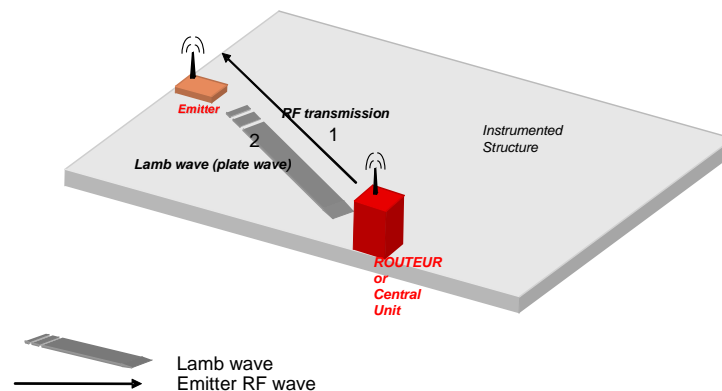


Figure 8: Communication and health monitoring strategy for autonomous wireless systems

Finally, the last task of this workpackage focused on the requirements of the different components of the system. Each functionality was analyzed separately to lay out the blueprints of design for energy management, lamb wave emission, RF communication, test structure design requirements, constrained layer damping... and work on the integration of the designs in the system.

The different contributions were compiles into a deliverable that fully documented the characteristics and requirements of the one-dimensional system that has been built on the demand of the consortium. This demonstrator system consists in a simplified prototype of self-powered Lamb Waves (LW) and radio Frequency (RF) transmission on 1D sample, and is operational at T0+12 as targeted in our success measurement table of the project proposal. This helped to propose a first definition of the basic characteristics and requirements of the system for energy consumption and performance of VDCu (energy harvesting and LW components) and also of the receiver. Based on the specifications of the target applications (task 1.1), INSA provided an estimate of the resulting energy balance under realistic vibration levels.

1.4.2 WP2 – System design and virtual integration

1.4.2.1 Objectives

The objectives of the second workpackage of the ADVICE project are to design and to virtually integrate the whole VDC system with regards to the requirements and characteristics of the VDCu, of the network, of the electrical systems and of the receiver and of the central station which were all defined in the previous workpackage.

The work performed comprises:

- the validation of the strategy feasibility using the one-dimensional demonstrator,
 - the SOI integration of the energy harvesting SSHI (power management module) and SSDI (damping module) circuitry,
 - the design of the RF communication module (in particular, the development of a unique low power RF module featuring both emission (TX) and reception(RX) modes),
 - the measurement of the consumption the Digital Signal Processing (DSP) module of a platform based on System-on-chip (SoC from Texas Instrument) for the estimation of the damage index,
 - the investigation of bonding issues for the integration of piezo-patches to the host structure,
- and finally the main achievement resulting from it are is the completion of the system design.

1.4.2.2 Methodologies and approaches employed

The VDC strategy that was chosen in WP1 is here implemented according to the methodologies described in this section, with regards to the specifications of the target application and the energetic requirements of the system.

Energy harvesting

The retained material for energy harvesting are surface mounted piezoelectric PZT ceramics, whose surface, shape, bonding conditions and locations were optimized using numerical tools. The energy extraction is performed by Synchronous Switch Harvesting on Inductor (SSHI technique). Apart from the very brief sequence of Lamb wave emission, the energy harvesting circuit is connected to the piezoactive material and running continuously.

Towards the development of the energy harvesting subcomponent using the SOI technology, CISSOID validated the model based on the results obtained by INSA for the standard AC configuration (Figure 9, where spice simulation using the modified electronic switch proposed by CISSOID shows a good agreement with theoretical SSHI previsions, for both power magnitude and dependency with the electric load) (Figure 9) as well as for the electrical waveforms of the SSHI technique (Figure 10)

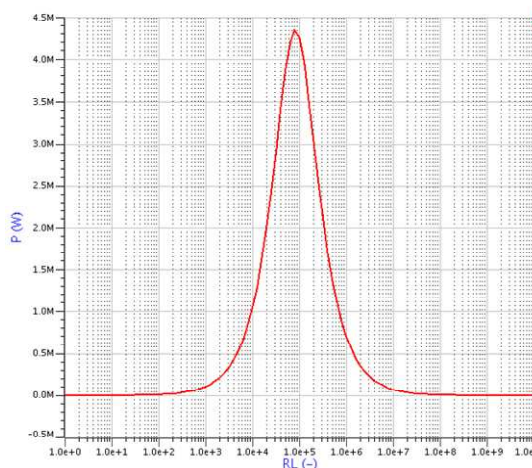


Figure 9. Standard AC simulation in SPICE: output power versus load

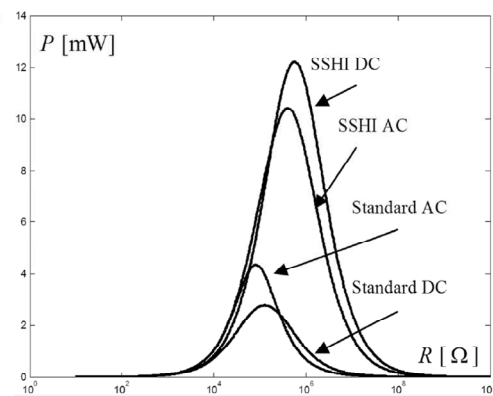


Fig. 10. Harvested power versus the load R for the same displacement amplitude ($\alpha = 0.0035 \text{ N/V}$, $K_E = 22000 \text{ Nm}^{-1}$, $M = 444 \text{ g}$, $C_0 = 55.8 \text{ nF}$, $Q_I = 2.6$, $u_m = 0.6 \text{ mm}$).

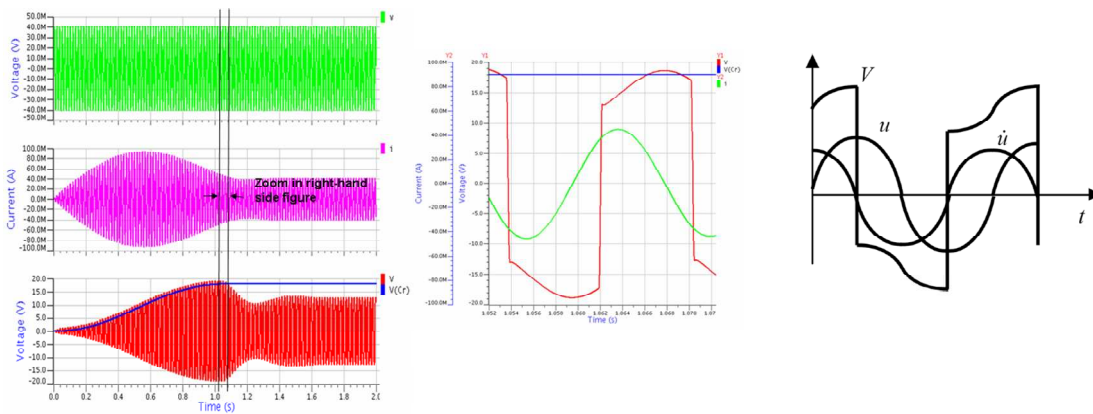


Figure 10. Simulation of the SSHI parallel voltages (left) and theoretical voltages (right).

Damping

Vibration damping is performed by SACL D device aside from the VDCu. Preliminary study of the comparison between SACL D, PCL D and SPCL D damping using the same piezoelectric patches as those used for energy harvesting and other materials concludes that: e detection strategy comprises the following signal processing:

- when using piezoceramics only, usually harder than an aluminum or composite base plate, their rigidity will have the strongest influence on frequency changes
- the harder the constraining layer, the higher the variation, so even using a steel constraining layer with a piezofilm sensor would imply a higher damping increase than using a ceramic sensor and a piezofilm actuator (so, a trade-off between the increase of damping and the wanted power from energy harvesting module has to be found)
- There is an almost negligible influence of segmentation when it is applied in a way that preserves the basic energy harvesting configuration.

Additional damping is available thanks to a SSDI module of the VDCu. Towards this end, a dedicated smart switch has been developed using SOI technology, featuring an enable/disable pin. One can also note that even when SSDI is not used, some reduction of structural vibrations also results from the electromechanical conversion performed by SSHI (but knowing that the technology developed in ADVICE is optimised for energy harvesting, in particular the electrical impedance of the DC-DC converter which links the rectifying and the energy storage stages is closer to the optimum load for SSHI than the one required for SSDI).

RF communication strategy

The examination of the whole structure starts right after landing. The global wireless network topology is presented in Figure 11. It features:

- **a gateway**, which role is to communicate with the base-station, and send commands for interrogating the VDCus. The Gateway contains two modules: one for RF communication (with End-nodes) and one for serial communication (with the base station),
- **end-nodes**, deployed in a mesh network, which role is to interrogate VDC'us, receive Lamb waves and send calculated data to the gateway. The end node is permanently powered by external supply,
- **VDCus**, deployed in a star network around each end-node, which role is to act as autonomous Lamb wave actuators.


It was decided to adopt an energy efficient polling strategy, where data transmission (RF communication and/or the LW transmission) is dictated by the master node (called router or End-node). Communication between Gateway and End-Node is based on the following polling scenario.

- 1 - The Gateway sends command to the end node to interrogate the VDCus
- 2 - End node interrogates VDCus, receives lamb waves from them and calculates FFT of the Lamb wave signature.
- 3 - When the end-node receives the command to transfer FFT data, it sends it to the gateway with the ID of each VDCu, for the calculation of a damage index.
- 4 - The End-Node successively interrogates each VDCu present in his sub-network for sending lamb wave.

5 - As a slave node, the VDCU wakes-up periodically (with a low duty cycle e.g for 10ms every 10 seconds for instance), checks its available power and wait for the polling from the master node. During its period of listening, if the VDCu receives command from End-node, it sends the Lamb wave as well as its ID, and returns to sleep mode.

The main drawback of this sequential VDCu interrogation is that it leads to longer wake-up processes, then longer interrogation sequence (period of the duty cycle times the number of VDCus), but its great advantage is that data retransmission is no longer necessary (because there is no risk of packet collision), which leads to substantial energy savings.

NETWORK of sensor and actuators deployed in the ADVICE Test-bench

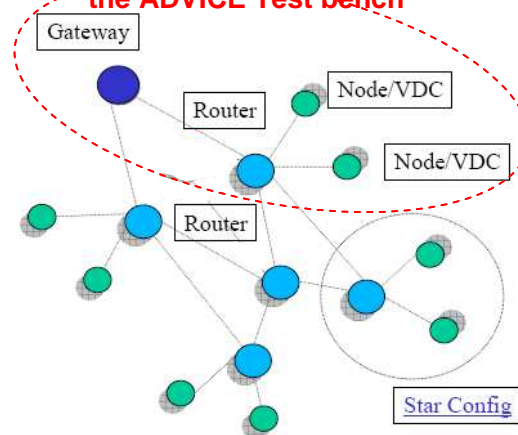

Sub- Networks

- Mesh sub-network: Gateway and Routers
- Star sub-network: Nodes and a router

Figure 11. Global network topology for wireless SHM and overview of the simplified network deployed in ADVICE's test rig

Damage detection

The damage detection follows the structural Health Monitoring scheme of interrogating the structure through transmission of ultrasonic guided waves. One of the piezo patches of the VDCu is used to launch a wavepacket into the structure, the sensing of the propagating Lamb wave being ensured by another piezoelement situated on the receiving node (Figure 29 in paragraph 1.4.4.3 shows the numerical simulation of the Lamb wave propagation in the ADVICE's test structure employed between VDCu 1 and End-node).

For energy savings concerns, the electrical signal introduced into the transmitter is a simple 100 μ s short square burst. Signal tailoring relies on the shape of the emitter and on the use of external additional components (such as a solenoid to form an oscillating circuit with the clamped capacitance of the piezoactuator)

The damage detection strategy comprises the following signal processing:

- the calculation of the Fourier Transform of the ultrasonic signatures received through embedded FFT algorithm within the processing core of the End-node,
- the computation by the base station of a Damage Index (DI) based on the Fourier coefficient,
- the evaluation of the severity and (if applicable) the position of the damage by Neural Networks, also implemented in the base station.

1.4.2.3 Conclusions

The achievements of WP2 are the design of the system, based on the VDC strategy selected in WP1 and in accordance with the identified constraints and requirements and the design of its components: VDC unit, network, "data treatment & analysis" station (base station).

1.4.3 WP3 – System development and manufacture: Preliminary tests

1.4.3.1 Objectives

Workpackage 3 objectives are the development and manufacture of VCDus, of the central station and of the network according to the system design and following the visa for development both delivered in workpackage 2. Development and test of these main features are done in parallel, each of them being managed by a leading partner responsible for checking dependencies, identifying blocking points, and monitoring the global progress of the manufacture and tests. Individual tests of the different modules will precede joint tests that require the assembly of the test rig and the test structures.

1.4.3.2 Methodologies and approaches employed

VDCu development, manufacture & test

Development and test of the power management module of the VCDu were achieved through joint experiments between CISSOID and INSA. It has been chosen to integrate surface mounted SMT components for the power management module. The main criteria considered for selecting these components are compactness and performances.

A first test chip containing the SSHI and SSDI circuits has been implemented and fabricated on XFAB 1 μm SOI Process. The fabricated wafer has been diced and dies have been packaged for PCB test. The design of the test setup PCB and test prototype with building blocks (switch, rectifier, comparator, DC-DC converter, ...) have been finished (Figure 12). The complete system SSHI module + Rectifier + DC-DC Converter + Storage device has been tested using a specific test structure provided by INSA (Figure 13).

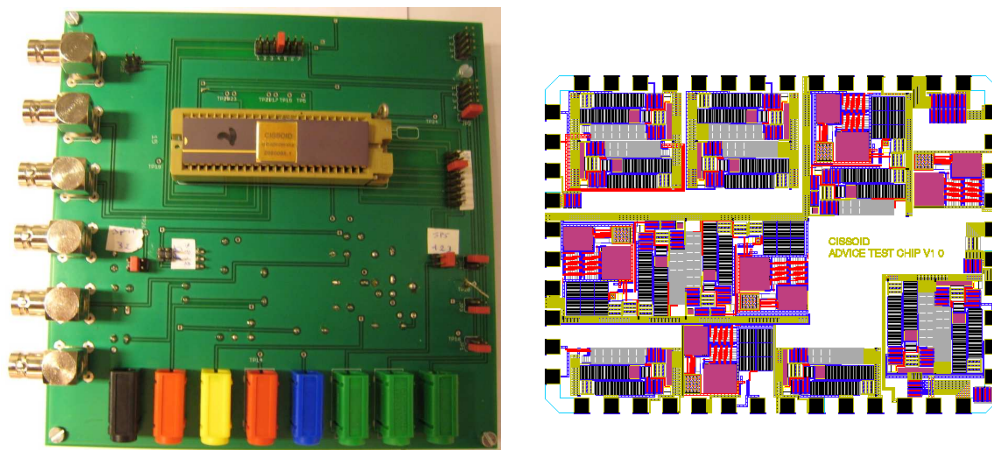


Figure 12. Printed Circuit Board (PCB) development, test PCB with SOI chip version 1.0

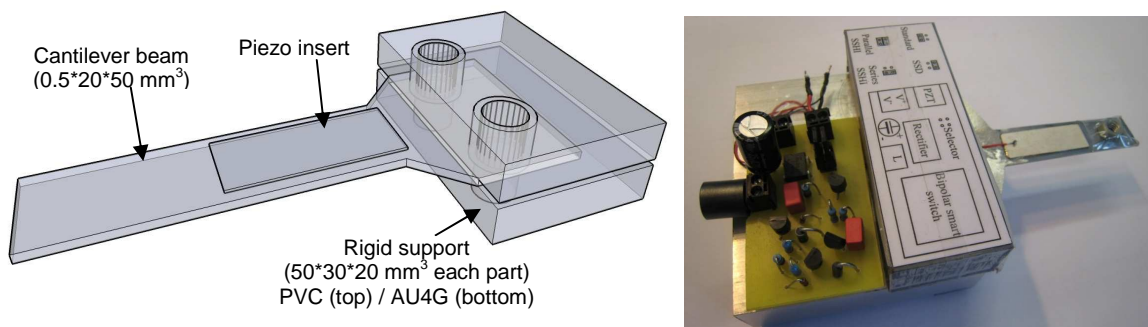


Figure 13. Miniaturized Test structure

Later on, a redesign of circuits based on the test results, leads to the definitive version of the chip, the power management ASIC (Application Specific Integrated Circuit) being packaged in a plastic 16 leads SOIC (Small Outline Integrated Circuit, shown in Figure 14).

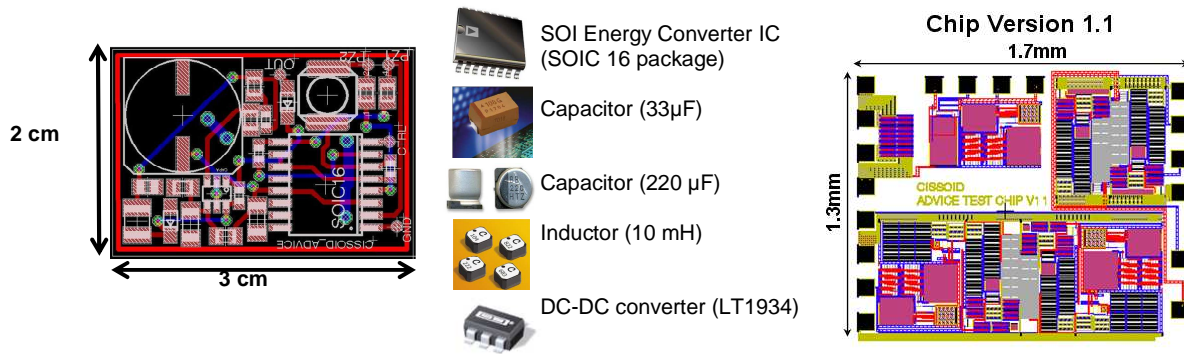


Figure 14. PCB of the VDCu power management module, with SOI chip version 1.1

Validation of RF communication between devices

To validate, the operational RF module developed on the same platform for VDCu , End-nodes and gateway, the test setup shown in Figure 15 has been realized, with in particular one self-powered VDCu and one externally powered VDCu for accuracy verification.

Figure 16, shows the duty cycle of the VDCu, which wakes-up every 10s and stays in RX mode during 10 ms for listening if there is interrogation from End-Node. Every each listening sequence of the VDCu consumes approximately 1.0362 mJ (when the microcontroller is running at 32 MHz). Figure 17 shows the associated variation of the voltage due to this sleep, wake-up and listen sequence, and the following table details the measured consumptions:

Interval	Description	Duration	Current	Datasheet	Energy
1	VDCu on Sleep mode	10 s	0.001 mA	0.5 µA	0.0033 mJ
2	Wake-up of the VDCu (MCU run on 32MHz clock)	1 ms	12 mA	10.5 mA	0.0396 mJ
3	Radio RX mode ON	10 ms	29 mA	26.7 mA	0.957 mJ
4	Turn OFF RADIO RX mode	0.1 ms	20 mA	--	0.0066 mJ

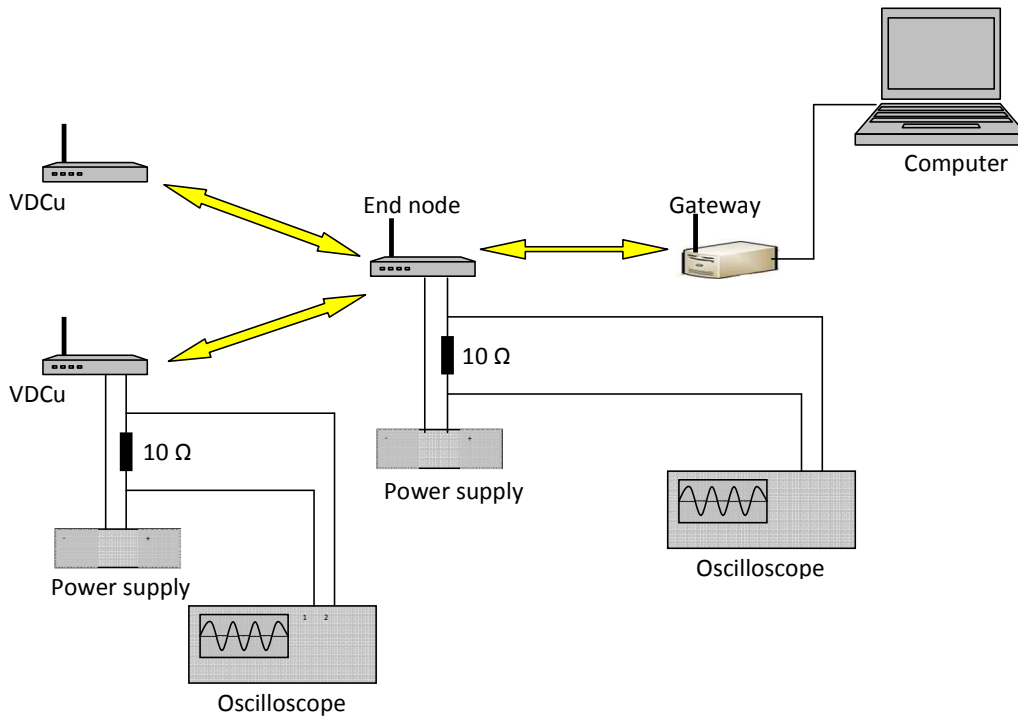


Figure 15. RF communication test setup

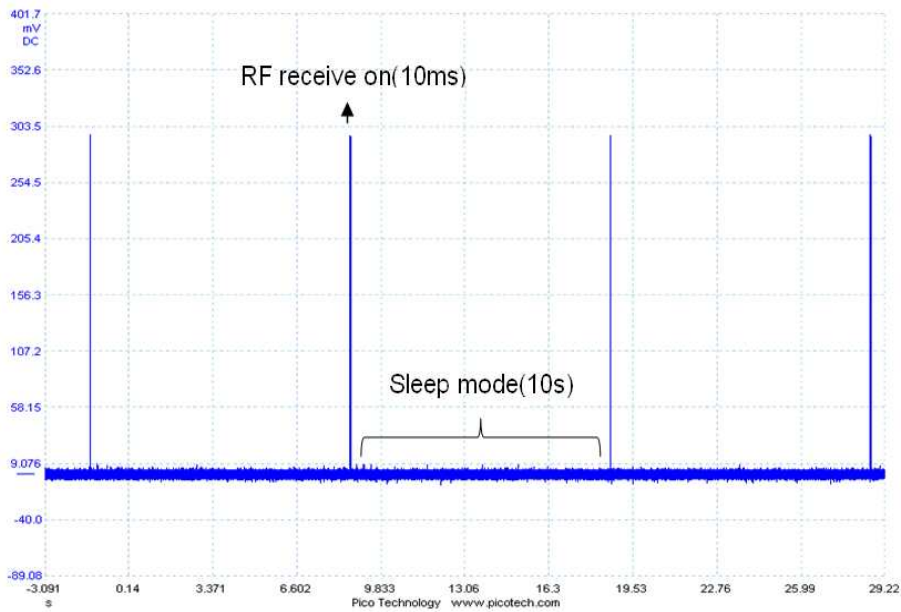


Figure 16. VDCu wake up sequences

Where an interrogation from End-Node occurs, every listen/transmit/ sequence of the VDCu consumes less energy than the previous case because the consumption is mainly due to the receiving mode, which last for a shorter period because of the polling. Figure 18 shows the associated variation of the voltage due to this sleep, wake-up and listen sequence, and the following table details the measured consumptions:

Interval	Description	Duration	Current	Datasheet	Energy
1	VDCu on Sleep mode	10 s	0.001 mA	0.5 μ A	0.033 mJ
2	Wake-up of the VDCu (MCU run on 32MHz clock)	1 ms	12 mA	10.5 mA	0.0396 mJ
3	Radio RX mode ON	10 ms	29 mA	26.7 mA	0.957 mJ
4	Turn OFF RADIO RX mode	0.1 ms	20 mA	--	0.0066 mJ

VDCu consumption in this case = 0.033 + 0.0396 + 0.957 + 0.0066 = 1.0362 mJ

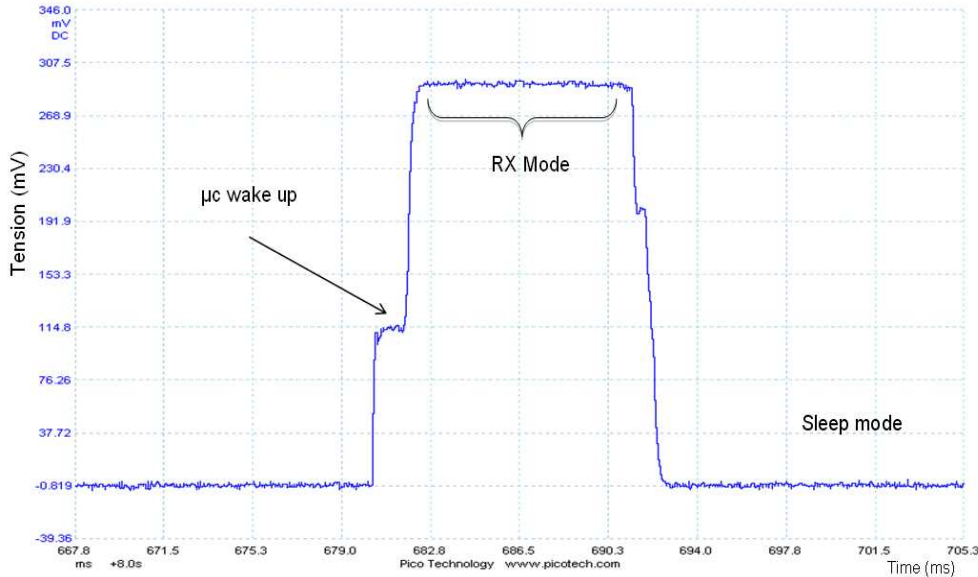


Figure 17. VDCu power consumption when not interrogated by End-node

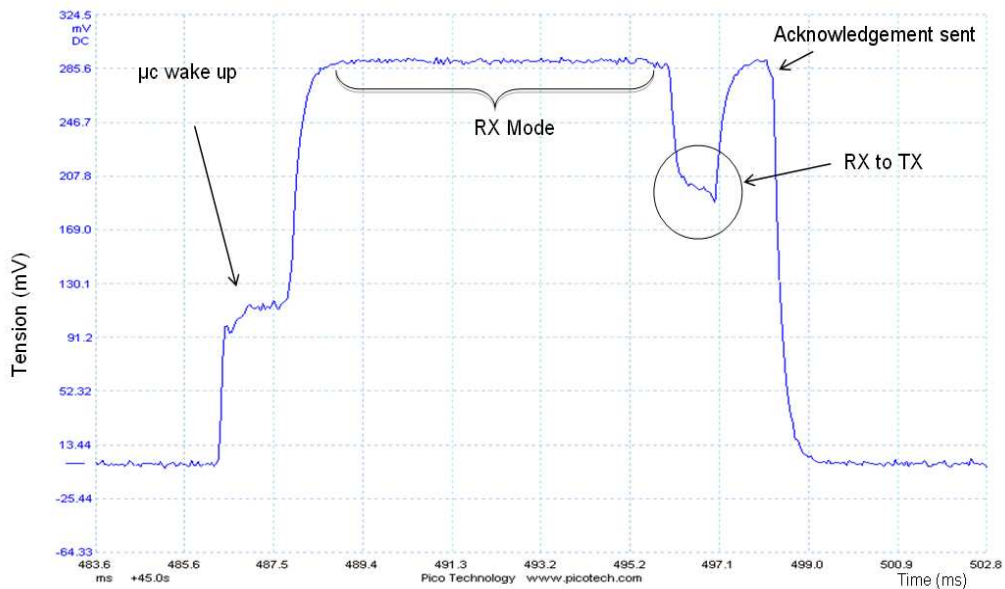


Figure 18. VDCu power consumption when interrogated by End-node

Final assembly of the VDCu

Finally, all VDCu electronics have been merged, and successfully tested after two bugs being fixed:

- DC-DC startup
- Addition of Zener diode for over-voltage protection

The manufactured VDCu is presented in Figure 19, showing the previously described power management module along side the CC2430 circuit (this component is highly suited for systems where ultra low power consumption is required. It includes high performance and low power 8051 microcontroller core. Low power consumption of CC2430 is insured by various operating modes) as well as the SMD antenna placed on the circuit board.

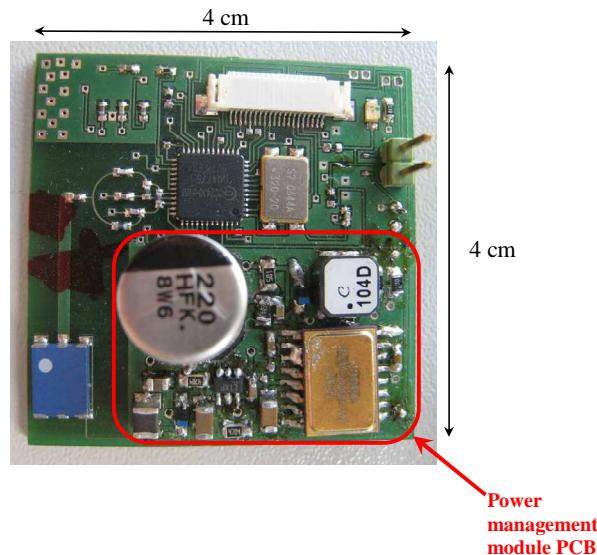


Figure 19. Final common VDCu PCB merging CISSOID's power management module (see Figure 14) and UCL CPU and RF modules

Central station development, manufacture & test

GOODRICH developed, manufactured & tested the central station, which is in charge of controlling the execution of VDC sequences and retrieving and computing all VDCus and End-nodes data. The central station main functionalities are:

- to perform internal Built-in Test (BIT)
- to monitor VDCu activity and integrity (VDC network status)
- to detect the the aircraft ground/taxiway conditions
- to initiate the VDC sequence
- to receive DI and VDCu IDs (and LW signature as a provision)
- to manage, consolidate and store historical data
- to analyse structural change and survey evolution
- to synthesise results and display on a MMI (Pilot/Maint. crew)
- to generate structural change report for maintenance Crew

GOODRICH also developed a man-machine interface (MMI) which allows maintenance crew to identify possible damage location on the aircraft. It comprises three different profiles:

- The global profile, which displays the aircraft's global status. The pilot can have a comprehensive view of the synthetic state of the plane, globalized for different sections. A three-color indicator can for example be used to render the situations when :
 - no structural change is detected in the section and all VDCus operational, or
 - a structural change is diagnosed or at least one VDCu measure was not acknowledged, or
 - a structural change appeared in the section.
- The Structure Maintenance profile, which enables the VDC structure diagnosis. This profile will display global data, but will also allow the user to zoom on particular regions if a structural change is to be located. Once the zoom performed, the last five damage Index values (for instance) can be displayed by clicking on the targeted VDCu.

- The VDCu System Maintenance Profile, which performs internal VDC system diagnosis. In that profile, the user can access all system data like full VDCu information or the end-node status. Clicking buttons give access to more detailed information such as
 - graph of the DI history
 - maintenance history
 - VDCu answers history ...

In the frame of the ADVICE project, since the Central Station is not an airworthiness device, this MMI is applicable on a demonstrator supposed to represent part of the aircraft structure. Indeed, this activity does not focus on electronic hardware development but mainly on the development of the software application. The software has been developed using Microsoft Visual Studio 2008 and Microsoft SQL Server Express 2005. The development language selected is Visual C++.

The demonstrator MMI also integrates commands to initiate the VDC sequence on demand.

Final compatibility check

To ensure the continuous compatibility between the multiple sub-components in the developed devices, GOODRICH took in charge the compatibility of them, and towards this aim, it asked each partner to describe his interface with other partners. A template interface specification document was provided to help the partners in this survey and to ensure that each partner on both side agree on the data. After the design phase and during the development phase, the compilation of the interface forms allowed checking the compatibility between the modules inside the components and between the components of the global system. This was aimed to decrease the chance of incompatibilities while integration will take place, in order to reduce the risk of subsequent delays in solving them.

1.4.3.3 Conclusions

To fulfil its ambitious requirements, the VDCu should comprise a microgenerator, a Lamb wave transmitter, a Radio Frequency unit, a core processor and a power management module. Assembling all these features in one single energetically autonomous device was a great challenge. It has proven to be feasible thanks to the joint efforts and the good coordination of the different developers involved in WP3 combining a wide range of expertises such as:

- wireless Network communication,
- piezoelectric materials,
- low power technology,
- energy harvesting,
- vibrations analysis,
- neural networks and embedded electronics development and programming.

The VDCu was initially planned to be assembled in one single package with limited surface and weight, to minimize the effect of the presence of the device on the vibration of the structure. Due to some delays in the integration of the different features of the VDCu, it has not been possible to build the appropriate packaging, but the final assembly has been done with compactness and light-weight in mind, the electronics being limited to a surface equal to the total surface occupied by the different piezoelectric patches to be bonded on the host structure.

The whole system integration, including VDCus, End-node, gateway and base station was only made possible by following important integration steps such as the permanent compatibility check through design phase by integrator, the virtual integration to evaluate interaction between components and the final compatibility check and recommendations for actual integration. This was accomplished thanks to the involvement of partners working on various innovative fields requiring much interaction in multidisciplinary activities from:

- theoretical studies, to phenomena modelling
- physical behaviours simulations
- electromechanical designs
- software developments
- hardware programming
- system integration

without forgetting the need for constant evaluation of compatibility and feasibility through evaluation of the energy balance.

1.4.4 WP4: Integration & Validation – safety & reliability assessment

1.4.4.1 Objectives

The system to validate consists in a set of test structures fitted with autonomous VDCu and an end node. A gateway and a central station complete the system for data collection and processing.

The system ensures the functions of health diagnostic of the test structures. It is in part autonomous as some energy is harvested from the mechanical strains generated under structural vibrations. This energy is scavenged by the VDCu electronics and used for sending an ultrasonic wave along the test structure skin. This wave (Lamb wave) propagation is affected by any damage on the structure. An analysis of the received wave by the end node electronics allows damage detection capability.

During the integration, the following functions had to be checked:

- Energy harvesting
- Power management
- Lamb wave generation and reception
- Damage computation
- Wireless network
- Data storage, consolidation and display

The tests objectives were to submit the system to vibration spectra representative of aircraft structures during flight and then evaluate the damage detection capability under these conditions.

1.4.4.2 Methodologies and approaches employed

Ten test structures in carbon fibre composite material have been manufactured, using aircraft structures manufacturing processes. To increase representativity, a stiffener was implemented.

The system capability to diagnose the health was evaluated by comparing the results from healthy structures and damaged structures. The damages type were either a through hole or blind hole or delamination.

The following shows the positions of End Node and VDCu defined according to simulations providing the best configuration.

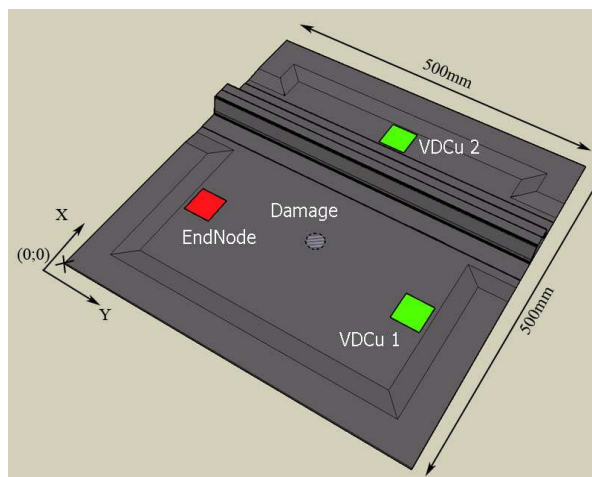


Figure 20: VDCu and End node locations on test structure

The end node function is to process the two lamb wave signals coming from the VDCu 1 and VDCu2 and to calculate so called “Damage indexes” for each transmission, which results from a comparison between the signals acquired and a pristine “healthy” reference signal.

By radio frequencies the end node transmits the damage indexes to the central station, via a gateway. The gateway is a communication relay between several end nodes and the central station. The central station correlates all the received damages indexes to compute a health diagnostic of the structures. This is obtained by a neural network, comparing the set of received damage indexes to a database of training data. The training data allow the neural network to distinguish damage cases from healthy cases. The outcome is a score called “maintenance score” used for maintenance decision making. The central station thus displays the

results to the maintenance crew by visually pointing on an aircraft global view at the structures requiring maintenance action.

Each sub-system was validated before integration. The integration allows confirming the compatibility between all sub-systems and evaluates the capability of the system to operate as expected.

To validate the system functionalities, the following test set up have been designed.

For the energy harvesting validation, a shaker has been used to generate aircrafts vibration spectra and thereby identifying the energy storage capacity.

For power management, the electronics have been equipped with test points to monitor the levels of energy consumed during the functional sequences versus the scavenged energy.

For Lamb wave generation and reception, the ultrasonic wave signals (analogic and digital) have been monitored.

The damage index computation from the end node was compared to the theoretical Matlab post treatment of the lamb wave signals.

For the wireless network validation, all signals were duplicated in RF and RS232 communication. Communications through both paths were compared.

For the central station validation, the database content was checked by validating that the damage index computed by the end node was identical to the one stored in the central station. The damage index was then visualized on the screen showing a plane on which the test structure was a wing partial area.

1.4.4.3 Work performed and end results

The Figure 21 presents the set up configuration with remote electronics and powered End Node.

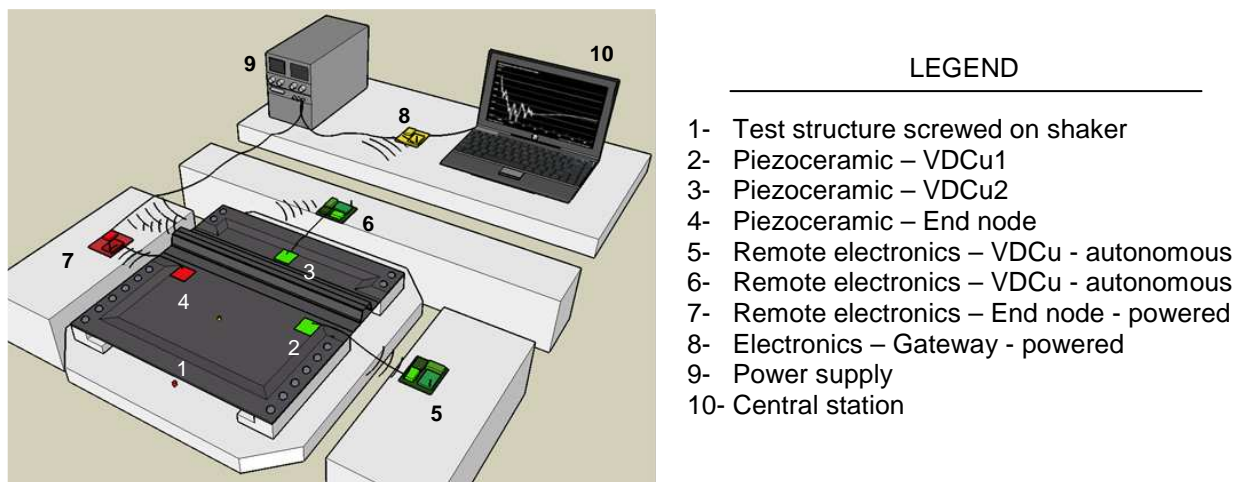


Figure 21: Test actual set up configuration

The test structure has been equipped with piezoceramics patches glued on the positions providing maximum strain under vibratory excitation. Five ceramic slices are used per VDCu, four dedicated to the energy harvesting function while the fifth slice is used to generate the Lamb waves.

The following figure symbolises the principle of connections between the piezoceramic patches and the electronics circuits, either the VDCu or the End node.

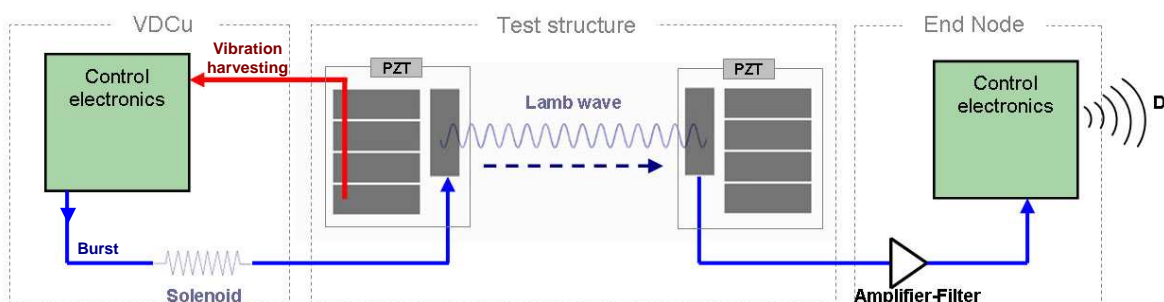


Figure 22: Connections layout

The piezoceramics patches have been tested to check that the coupling factor, which represents the capacity of the piezoceramics to convert mechanical energy into electrical energy, had satisfactory values, confirming that the gluing process was homogeneous throughout all the slices.

The circuit boards, called “control electronics”, have been connected remotely to the components presented in the Figure 22. The same circuit boards have been used to for the manufacturing of the VDCu, end nodes and gateway as shown on the Figure 23.

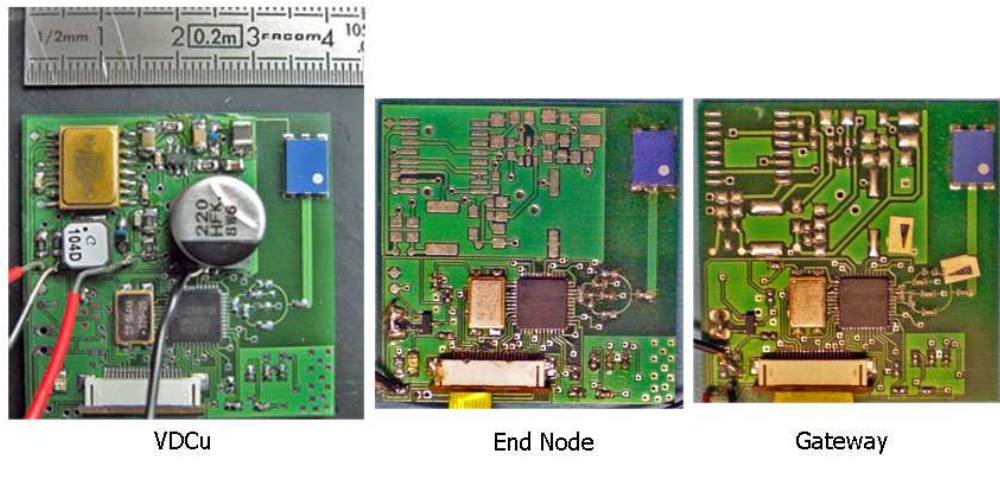


Figure 23: Control Electronics - Layout commonalities

The installation on the shaker is presented in the following figures:

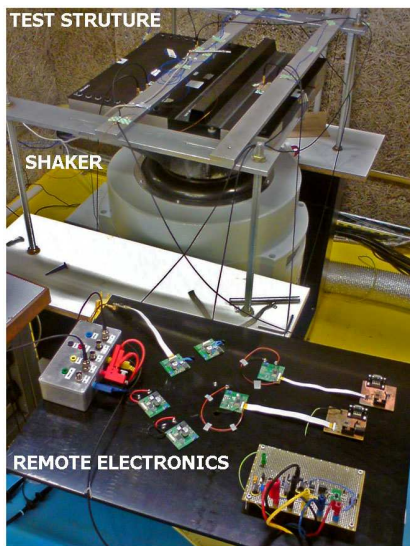


Figure 24: Shaker installation

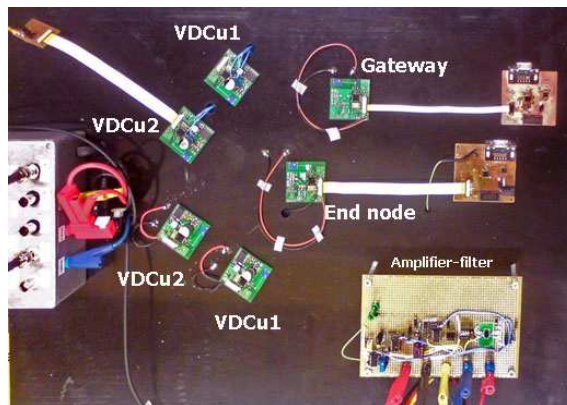


Figure 25: layout of hardware connections for testing

Energy harvesting

The monitoring of the energy scavenging within the electronics is presented in the Figure 26 where the block diagram represents the harvesting module, showing on the left the voltage available at the Piezoceramic and on the right, the voltage available at the input of the microcontroller downstream, regulated at 3,7V by a DC-DC converter.

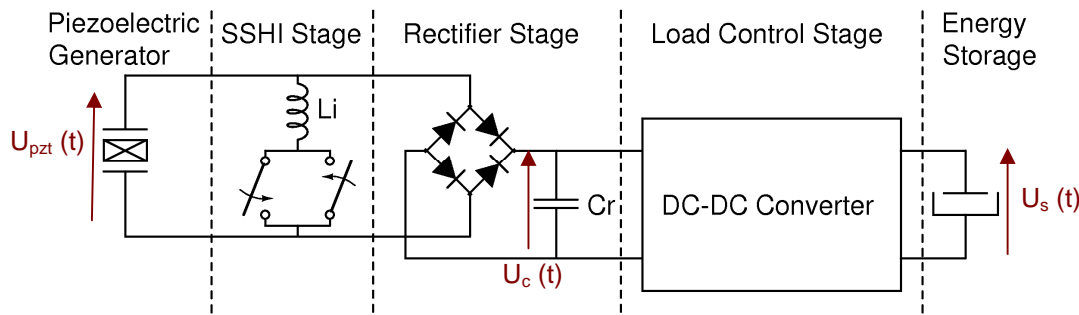


Figure 26: Harvesting circuit measurements

The piezoelectric generator block converts the mechanical vibration to electrical signal via the piezoelectric effect.

SSHI stands for “Synchronized Switch Harvesting on Inductor”. This circuit uses a smart switch and an inductor to enhance the harvesting capabilities of the piezoelectric generator.

The rectifier circuit converts the AC signal received from the piezoelectric generator using full bridge rectification to DC energy that is stored in capacitor Cr.

The load control circuit has two main functions: First, it guarantees optimal load that should be seen from the rectifier for maximum output power. Second, it converts a varying DC voltage from 4 to 40 V to a fixed DC voltage of 3,7V used to power the microcontroller downstream the circuit.

The energy harvesting capability has been evaluated under three types of random vibrations: white noise, airplane random vibration spectrum per DO160 section 8 and helicopter random & sine spectrum per DO160 section 8.

The measurement of the duration necessary to trigger the DC-DC converter has allowed comparing the levels of energy harvested. The DC-DC converter wakes up when its input voltage U_c reaches 10,7 Volts. The following figure shows the charging of the Capacitor (U_c voltage) during the vibration phase and then shows the energy consumption once the DC-DC converter allows the circuit to be supplied.

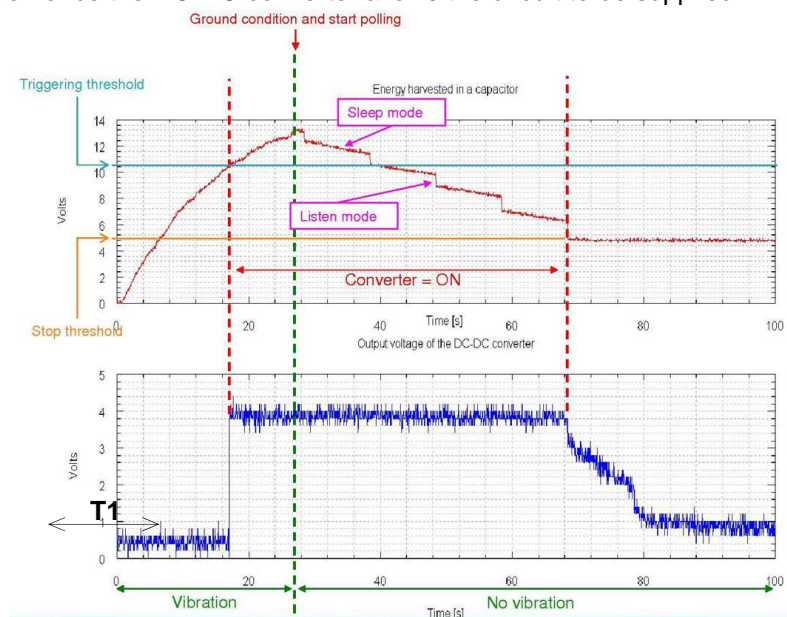


Figure 27: Energy harvesting and power consumption

On the top figure, the U_c voltage at the capacitor charges when random vibrations are applied. The voltages passes 10,7 V allowing the DC-DC-converter to start (bottom) regulating the output voltage U_s at 3,7 Volts. The duration “T1” to reach 10,7 Volts varies with the level of vibrations.

From a white noise of 0,00225g²/Hz, the charging reaches 10,7 volts after 700 seconds (11 minutes, 40 sec). The threshold for waking up the system is therefore defined at 0,002125 g²/Hz in white noise.

The scavenged energy allows an operating duration of 50 seconds which is considered at the current stage of the project and for concept demonstration purpose sufficient to answer to the End Node request for diagnosis.

The system revealed very sensitive to external environmental parameters like electromagnetic susceptibility, test setup layout and all aspects affecting the test structure modal response like temperature and boundaries conditions... Indeed, the preliminaries tests performed in sequences showed inconsistent results proving that some uncontrolled parameters interfered with the systems. To investigate the results inconsistencies, additional tests have been conducted to try to obtain repeatable results.

By analysing the voltage obtained, the strain was deduced on the bases of the piezoceramics coupling coefficient.

$$V_{pzt} = 2.08V / \mu def$$

This allows evaluating the applicability of the system on an Aircraft. The minimum random strain levels necessary to wake up the system are thus 2.17 μdef RMS and 8.65 μdef Peak.

Power consumption

Once the VDCu capacitor is charged above 10,7 Volts, the DC-DC converter turns ON. The 3,7 V power supply of the electronics is established. The next steps are made of three different modes: first the sleep mode, a wake up and RF reception mode (Rx), and then a lamb wave emission mode.

The sleep mode corresponds to the stand by state of the microcontroller. During this mode, the energy consumption is minimized. The wakeup mode is periodically set to 10 seconds. The wake up corresponds to a RF listening sequence which last 10 μsec . Once a communication is established with the end node, a lamb wave is launched.

On the Figure 28, the steps N° 1, 2 and 3, the consumption levels of each mode is seen by the slope values.

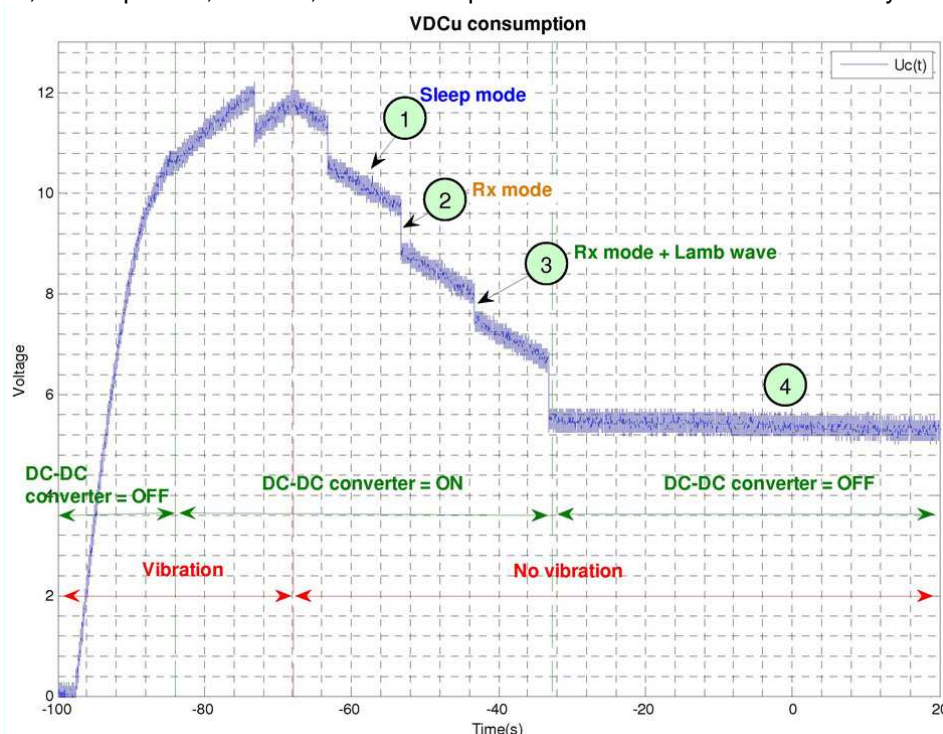


Figure 28: Energy consumption modes

Table 1: Power consumptions

#	Consumptions	Current	Energy	Power
1	Sleep mode	17,6 μA	0,3 mJ	0,15 mW
2	Rx mode	13,2 mA	0,6 mJ	64 mW
3	Rx mode + lamb wave	11,2 mA	0,4 mJ	85 mW
4	Converter OFF	1,1 μA	30 μJ	10 μW

Once the voltage has decrease below 5Volts, the DC-DC converter turns OFF.

The balance between the harvested energy and the consumption allows performing five attempts during 50 seconds. In the frame of this demonstration, this was sufficient to obtain a communication between the VDCu and the end node, and hence, a lamb wave emission for the health diagnosis.

Wireless communication

The control electronics were remotely positioned as shown on the figure 21. The communication between the VDCu, end node and gateway was checked by using spy bus. The consistence of the messages sent and received by the central station was checked on the way back, after the complete communication loop was performed.

The tests performed have shown that the communication between the components was satisfactory, although the repeatability was sensitive to the positioning of the electronics. A thorough study of robustness is still required to evaluate the parameters influencing the reliability of this communication path, such as the distance and the obstacles (like stiffeners on the structure).

Lamb wave transmission and reception

The lamb wave transits between the VDCu and the End Node through the skin of the structure. In the frame of the demonstration, two VDCu were used to generate lamb waves directed towards a unique end node as shown on the figure below. The positioning was chosen to identify the influence of the obstacles (stiffener) on the signal treatment.

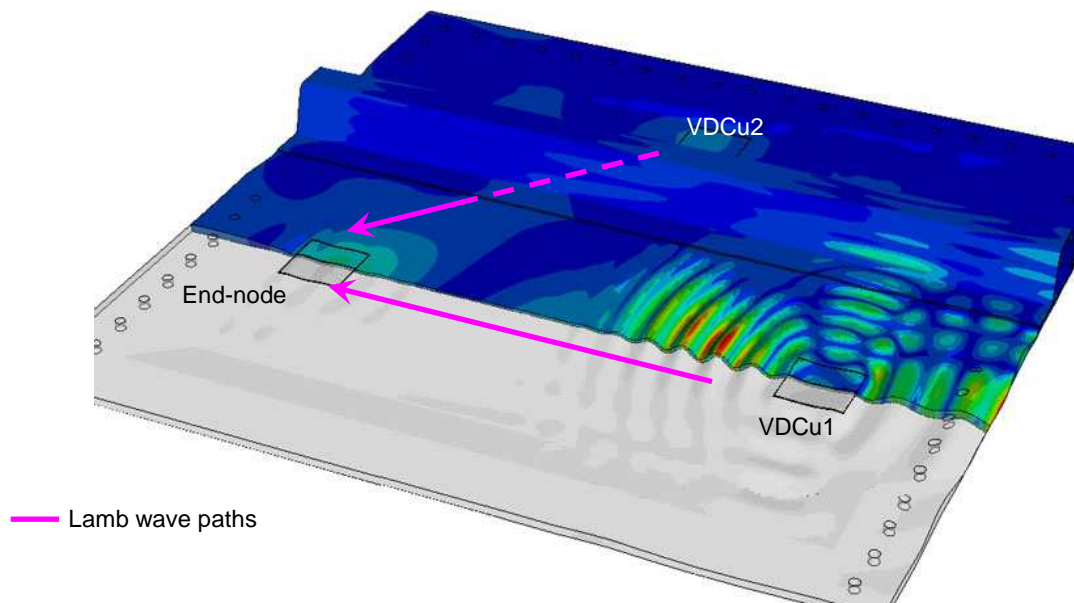


Figure 29: Lamb wave propagation from VDCu 1 to End Node

The signal measured at the EndNode piezoceramic is show on the Figure 30 (top).

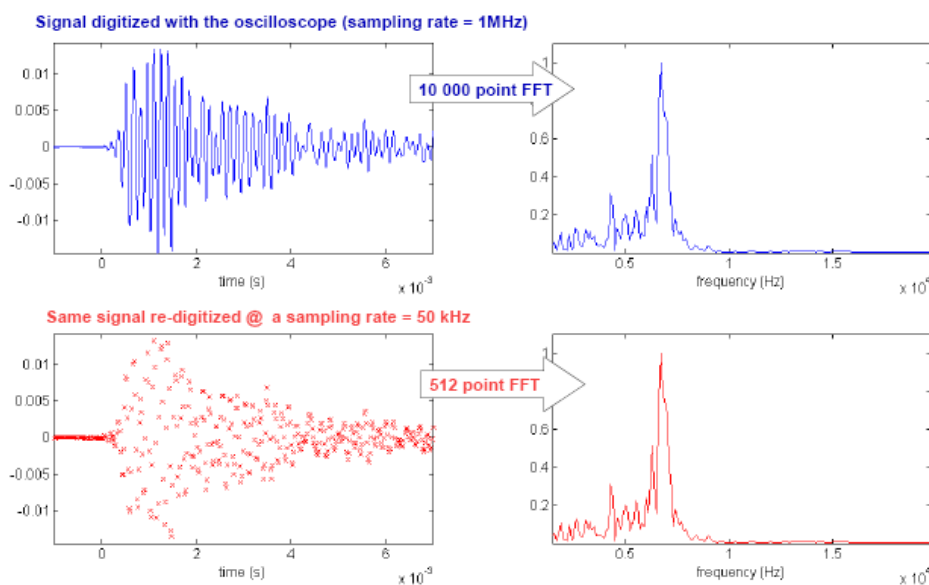


Figure 30: Lamb wave reception – FFT

This signal is digitalized by the End node at a sampling frequency of 46,7 kHz, which provides sufficient precision for the fast Fourier transform calculation.

Damage diagnostic

Damage detection functionalities are centralized at the level of the central station of the ADVICE system. The data collected at the level of the End-nodes (see Figure 31) during the Lamb wave propagation is collected at the end of each polling in order to process the different damage indices and evaluate the severity and (if applicable), the position of the damage.

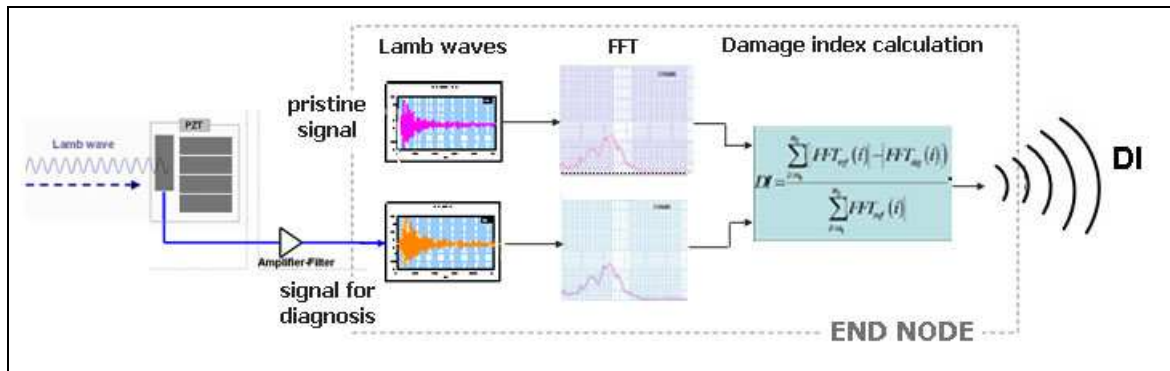


Figure 31: Damage index calculation in End node

Although the outputs on the different test structures used for the project are limited (only 2 VDCus and one end-node are used), the data allowed a first assessment and a proof of concept of the system functioning as a theoretically autonomous damage control unit.

Out of the 11 panels manufactured, eight were used to make measurement on the pristine and damaged state structure. Tests were carried out first on the pristine panels in order to characterize the reference signature and look at the influence of external parameters on the test structure behaviour (calculation of the damage index) as well as other reversible modifications to the test structures. Then the panels were later tested with progressive damage.

The test planning consisted in the following situations:

- Panel in pristine state
- Panel under various reversible conditions
 - o Added mass (with/without shear coupling, i.e. adhesive paste)
 - o Humid surface (water droplets on composite structure surface)
 - o Controlled temperature
 - o Controlled humidity
- Panel with modified boundary conditions
- Progressively damaged panel.

▪ **ADDED MASS**

Adding a mass on the panel can alter the Lamb wave propagation through the panel. This effect was studied with a 100g aluminium cylinder that was placed at different locations. The attenuation on the signal increases when adhesive is used as the interaction of the added mass with the shear waves is then present. Then thickness of glue does not have an important effect on the damage index.

▪ **TEMPERATURE**

Temperature effects have an important influence on the Lamb wave propagation of the test structure. While Lamb wave propagation dynamics are first of all modified due to some changes in material properties, the boundary conditions are also modified due to the difference in thermal expansion coefficient between materials. The piezoceramic behavior can also be modified due to these temperature changes.

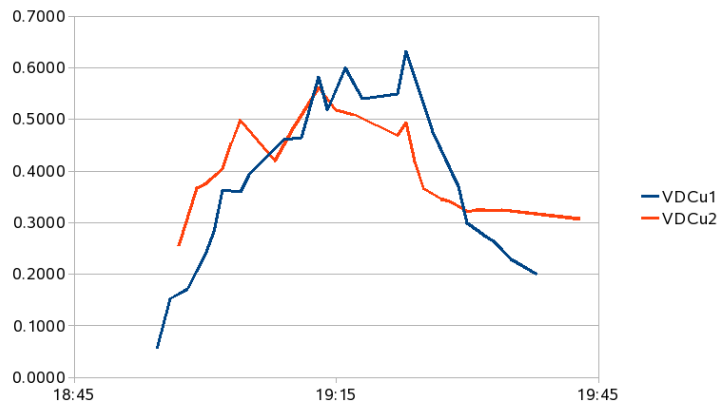


Figure 32: Evolution of the damage index coming from VDCu1 and 2 at different moments during the temperature cycle (20°C down to -40°C and back)

The damage index was recorded at different times during the temperature cycle for both VDCus. As show in Figure 32, the damage index increases to 0.6 before dropping back to 0.2 (for VDCu1) and 0.3 (for VDCu2). Further investigations could be done in order to study the influence of several temperature cycles as well as the influence of the speed at which the temperature varies.

▪ **HUMIDITY**

The panel was sprayed with water and measurements of the Lamb wave propagation were made between the VDCus and End nodes. The Lamb wave interacts with the film of water on the surface. The effect on frequency shifts is negligible, while the amplitude of the signal and FFT decrease.

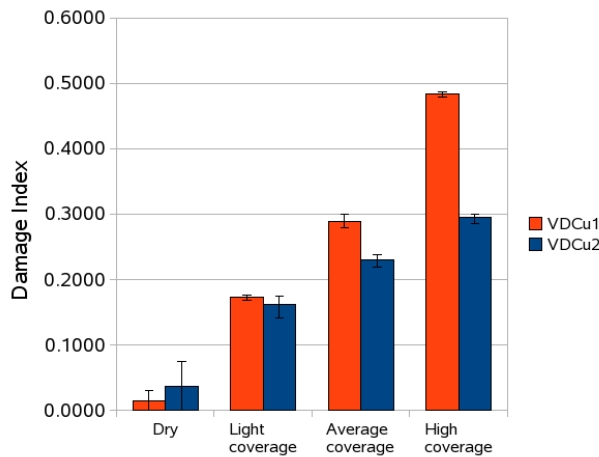


Figure 33: Damage index from VDCu1 and VDCu2 for different levels of water on the test panel

▪ **DAMAGES**

Two damage types were implemented in order to have a fast and effective way to progressively damage the panel without jeopardizing the operation of the VDCus and most of all, the bonded piezoelectric patches.

- A blind hole
- A through hole

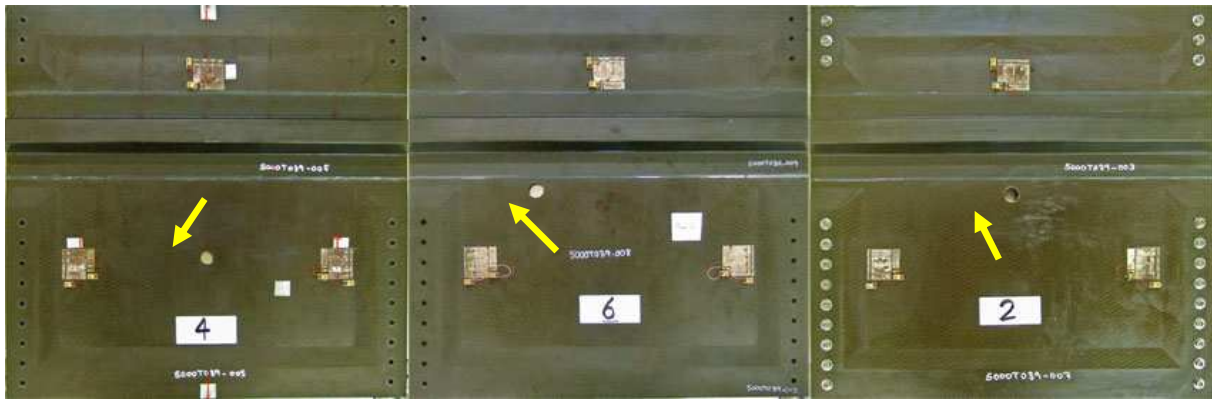


Figure 34: through hole positioned on the different paths between VDCus & End Node

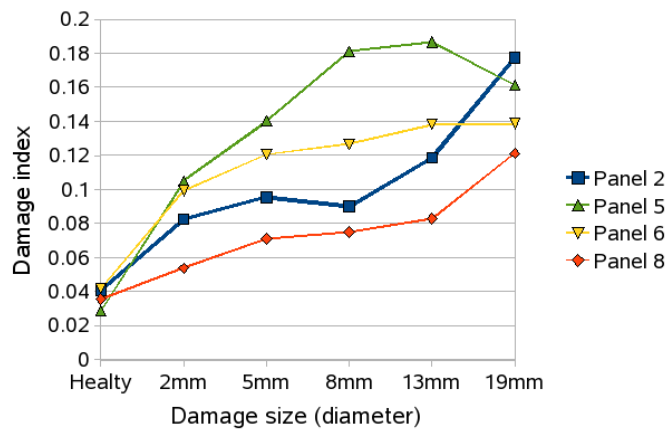


Figure 35: Damage index evolution from VDCu1 on panels

Even if a trend in the damage index can be observed for all the different panels, we clearly see in this Figure 35 that the interaction of the Lamb wave with damage is highly complex and that it is difficult to predict what will be the effect of a parameter on the damage index.

Neural network

Damage detection algorithms have been designed and implemented using a neural network to process the inputs sent by the different end-nodes. This neural network is feed-forward and based on a multilayer perceptron model.

The neural network showed its ability to use a training set in order to adapt neural parameters and obtain a response function that can eventually recognize damage index patterns. The sensitivity of the system in laboratory conditions was satisfactory as it was able to detect damage size of smaller diameter than that found in the requirements for the system.

Training by simulation is foreseen to be able to consider different damage cases that the neural network can use to help identify possible damage without necessarily having to damage several manufactured structures. The results also show that the neural network identifies the severity of the damages if a damage type has already been “learned” by the neural network. In other cases, a confidence level on results indicates if the structure is drifting from the original configuration.

Central station

The Central Station is part of the complete VDC system as the terminal device in charge of collecting and computing the data transmitted by the end Node. The Central Station is in charge of collecting all the Damage indexes and RF identifiers of the VDCus bonded to the structure under test. Software layers are linked together through the transmission and reception of dedicated data.

- **Data acquisitions:** Composed of hardware and software mechanisms to collect from external devices all input data required for the correct operation of the Central Station application.
- **Communication protocol:** To convert received data from external devices into Central Station usable information.

- **Built in Tests:** Contains Central Station functions that monitor the correct operation of the Central Station in terms of software and hardware monitoring.
- **Database:** Contains all historical data stored from previous structural change analysis and all system and configuration parameters.
- **Data Storage and Consolidation:** Contains all functions that manage the Data Base in terms of retrieving and updating corresponding data.
- **Structural change analysis:** Software part responsible for analyzing data stored in Database and to detect if a structural change has occurred. **Data synthetic display generation:** Software module responsible for performing a synthesis of the data to be displayed for the Man Machine Interface and Maintenance Communication interface.
- **Man Machine Interface:** Graphical interface for users displaying the results of structural change analysis and providing interfaces for setting up the system.

The displays seen on Figure 36 shows the different possibilities to access the aircraft health diagnosis once polling has been sent.

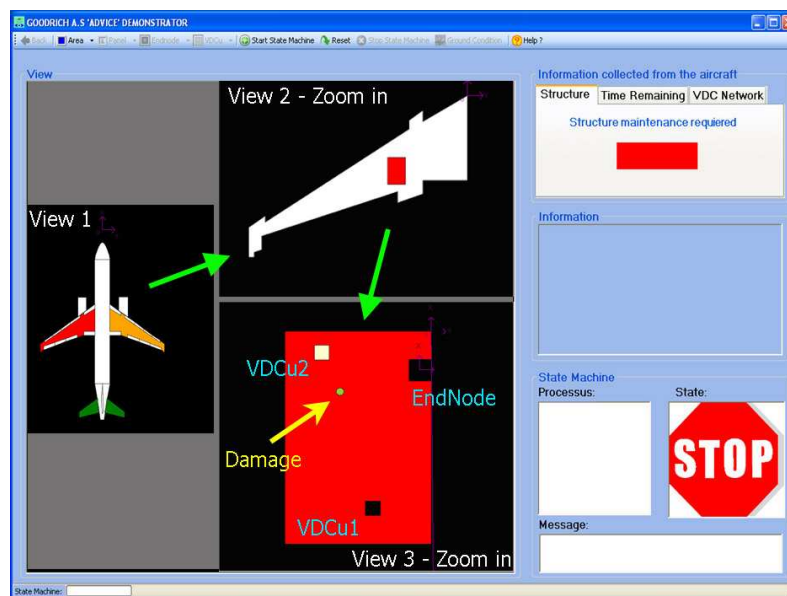


Figure 36: central station display after diagnosis request

Damping

Between the viscoelastic layer and the structure there is a PZT patch that operates as a sensor to know the vibration conditions of the structure. The constraining of the viscoelastic is done with another PZT on the top surface of the viscoelastic layer.

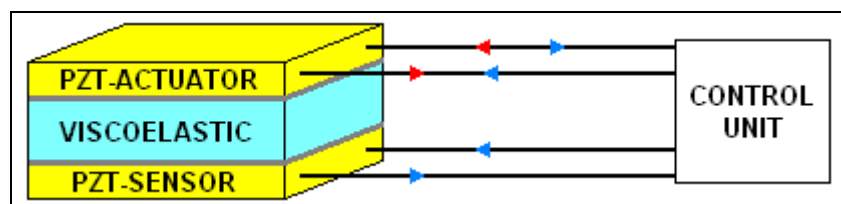


Figure 37: SACL D principle

The SACL D was composed of the following components:

- o 4 piezoelectric patches acting as sensors
- o 4 viscoelastic patches and another
- o 4 piezoelectric patches acting as actuators
- o These elements are square shaped, 50x50mm and placed in the centre of the panel

The purpose for the tests performed was to find the proper tuning resistance to optimize the damping capabilities of the SACL D.




Figure 38: SACLD location

Loss Factors were calculated for all modes as seen by all three accelerometers. The analysis and assessment of the vibration test measurements has shown an appreciable increment on the damping capabilities of the structure due to the application of the passive damping SACLD device.

1.4.4.4 Degree to *which* the objectives were reached

The following paragraphs give the limitations of the demonstrator developed in the frame of this project. Many limitations are coming from a limited integration of the system but don't affect the purpose of the demonstration which as shown a proof of concept.

VDCu

The VDCu is not fully integrated since the control electronics does not integrate the solenoid used to enhance the lamb wave signal generation.

The control electronics is not fitted on the piezoceramics and integrated into a packaged system as it has not been fully designed for vibrations robustness.

The components size on the control electronics (esp. the main capacitor) highly reduces the capability to be packaged in a compact installation.

Low power RF communication

The energy consumption of the sleep mode of the control electronics is too high compared to the scavenged energy, resulting in a full dissipation of the available power in 50 seconds once the minimum energy threshold has been reached. This small duration limits the robustness of the communication in case of repeated attempts when external conditions prevent clear and quick contact.

RF Network

The test campaign has been performed with only one sub-network composed of one end Node and two VDCus. Multiple sub-networks need to be performed for a full network capability assessment.

The communication strategy chosen relies on the RF listening at VDCu level to start the data exchange. This strategy is energy consuming because of the RF reception power requirements at VDCu level.

The polling strategy chosen between end node and VDCu has revealed an impossibility to prevent the VDCu from dissipating its scavenged energy immediately after reaching the wake up energy threshold. The energy is lost after 50 seconds preventing a diagnostic to be launched once the aircraft has landed and is in ground conditions. Loss of energy is not only due to the consumption of RF strategy, it is also due to the consumption of energy harvesting module.

The limits of the network communication have not been tested. In order to be completely exhaustive on the communication aspects, communication limits need to be further investigated like for example: communication length evaluation, robustness to obstacle (stiffener), communication robustness evaluation (repeatability and reliability).

Damage index

The damage index depends on the structure topology. A stiffener highly reduces the lamb wave amplitude and alters the quality of the transferred signal. The damage index in this case presents high variability without any structural change.

The damage index repeatability within the tested system was poor because the calculation is dependent on the lamb wave variations, which revealed highly sensitive to environmental and boundary conditions during the test campaign.

As a consequence, damage index can not be based on a polling performed on a vibrating structure, which excludes in-flight diagnostics, and imposes a fully stable aircraft state (let alone other environmental conditions variations).

Neural network

The neural network sometimes shows difficulties to make neural parameters converge in order to sufficiently reduce the error function, especially when the network size is too large. This indicates that an optimal network size has to be identified depending on the number of inputs that are available and the complexity of the patterns that need to be recognized.

On a given structure, the neural network is unable to perfectly distinguish different locations of damages with the two input signals that it is given. A larger number of VDCus must be used.

The detection of the type of damage has not been proven and needs further studies.

The system has been tested only on artificial damage (drilled blind or through holes), not with more realistic types of damage (impacts or delaminations).

Small changes in environmental conditions can create conditions (damage indices) similar to those found when damage actually occurs. More information must be collected either in terms of number of signals (VDCus), post-processing of signal (FFT or wavelet coefficients instead of damage index) or recording of external parameters (temperature, humidity, pressure,...).

Training through simulations is currently limited due to the important calculation time still necessary to complete the propagation of the wave in the structure.

1.4.4.5 Conclusions

This testing campaign has allowed characterising the quality of the system developed and tested within the Advice project, presenting the various achievements made in a wide range of technical domains which have required numerous expertises and great coordination within the consortium to commonly converge towards an ambitious goal.

Combining energy harvesting, structural damping, RF network, health diagnostic algorithm has proved to be feasible. The system showed encouraging results and paves the way for further activities to increase the maturity of the technology.

1.4.5 General conclusions

The ADVICE project led to the successful development of an autonomous wireless system that can be used for the detection of damage in structures, but also for the damping of structural vibrations. Several important milestones and technical improvement were achieved first at component level (each individual function of the system) and also on a global level (the system operating as a whole). The major technological developments and research included:

- Low power vibration harvesting through direct coupling on the structure and non linear processing of the electric signal
- Low power energy management solutions developed with SOI technology and optimized for a given environment
- Communication and polling strategies based on predictions of available energy
- Automated structural analysis of composite structures through Lamb waves
- Development of a centralized network and data management tool with associated APIs and man-machine interface.
- Representative numerical and experimental analysis of a composite structure installed on a electromagnetic shaker

Most of the initial objectives of the project were achieved, although some difficulties were encountered and some changes in strategy or objectives were made during the project. A nine month extension of the project was requested due to problems in the developments and testing of electronic boards as well as delays in the different testing phases due to compatibility issues during integration. Actions were taken on problems that were identified, but a few issues still remained at the time of the demonstration mostly in terms of robustness and communication errors between the gateway and the end-nodes.

Changes were made in the approach adopted for the development of the vibration damping elements (SSDI & SACL D) due to the fact that the priority was set quite early on vibration harvesting. These changes led to deviations from the initial objectives in terms of damping.

The project led to interesting results in the characterization of a direct coupling harvesting solution installed on a composite panel. An important amount of additional effort was put in the identification and the proper exploitation of vibration harvesting tests on the shaker. Damage detection algorithms such as neural networks were investigated throughout the project and led also to interesting outputs related to the parameters that can influence the healthy/damaged signal as well as the possible solutions and the requirements to be able to identify damage and eventually locate it. These elements show a high potential of damage detection through Lamb waves, but require further research work that can be based on the outcome and conclusions of this project.

The system as a whole still has to be considered at a low TRL level. Exploiting the ADVICE system (VDCus, End-Nodes and Central Station) will thus require additional research and development efforts in order to better control the influence of external parameters on the system (damage detection, harvesting, communication), and also improve the robustness and reliability of components and prediction of damage to further progress towards industrial exploitation. This should clearly be pursued through new research projects or interaction with other results from other projects.

On a component level, some elements can be exploited more rapidly such as the coupling between the harvesting methods and the power management, or the numerical prediction of Lamb wave propagation through layered composite materials. These are further detailed in the exploitation plan.

The partners of the ADVICE consortium have managed to develop a proof-of-concept for an autonomous wireless damage and vibration control system through identifications of goals, indicators of success, common requirements, prediction and analysis, development of components and finally integration and testing. Though the project was extended, overall, most objectives have been met with recommendations and lessons learnt having been identified and some paths to improvement and exploitation drawn out.

2. Dissemination and Use – Publishable results

2.1 Project and results overview

2.1.1 Project summary



EC PROGRAMME (see annex 1)	FP6-AEROSPACE
PROJECT TITLE	Autonomous Damage Detection and Vibration Control Systems
PROJECT ACRONYM:	ADVICE
CONTRACT NUMBER :	AST5-CT-2006-030971
PROJECT WEB SITE (if any) :	www.advice-project.eu
COORDINATOR:	
Coordinator's name	Dr. Anne Nawrocki
Coordinator e-mail	anne.nawrocki@cenaero.be
Coordinator telephone	+32 71 91 93 30
Coordinator organisation name	CENAERO
Coordinator organisation full address	Bâtiment Eole, 1er étage Rue des Frères Wright 29 B-6041 Gosselies Belgium
PARTNERS NAMES :	<ul style="list-style-type: none"> • CISSOID (BE) • EADS (DE) • AERNNOVA (ES) • GOODRICH (FR) • IAI (IL) • INSA Lyon (FR) • PROTOS (ES) • PZL (PL) • UCL (BE)
EC PROJECT OFFICER:	
EC PO name	Remy Denos
EC PO e-mail	remy.denos@ec.europa.eu
EC Directorate General	Directorate General Research

2.1.2 Overview of main project results

No.	Self-descriptive title of the result	Category (A, B, C)*	Partner(s) owning the result(s) (**) (referring in particular to specific patents, copyrights, etc.) & involved in their further use	Type of Result (***)
1	Optimal localization of piezoelectric material for energy harvesting from mechanical vibration	A	Cenaero	Scientific
2	Analysis of physics of Lamb wave propagation through finite element modeling	B	Cenaero	Scientific
3	Damage detection test campaign results and processing	B	Cenaero, Goodrich, INSA	Scientific, Database
4	Neural network software training and validation for damage detection in representative composite structure	B	Cenaero	Scientific, Software
5	Zigbee platform compatible with autonomous or low powered sensors network	A	UCL	Scientific Software Lab Prototype Demonstrator

* Category A: results usable outside the consortium
 B: results usable within the consortium
 C: non usable results

2.2 Description of each publishable result

No. & TITLE OF RESULT

No*.	Self-descriptive title of the result*
1	Optimal localization of piezoelectric material for energy harvesting from mechanical vibration

CONTACT PERSON(S) FOR THIS RESULT

Title, First name and Family name*	Ir. David Dumas
Position	Research Engineer
Organisation*	CENAERO
Address	Bâtiment Eole, 29 Avenue des Frères Wright, 6041, Gosselies, BELGIUM
Telephone	+32(0)71919372
Fax	+32(0)71919331
E-mail*	david.dumas@cenaero.be
URL	www.cenaero.be
Specific Result URL	-

SUMMARY*

The identification of the optimal position of piezoelectric elements for the harvesting of mechanical vibration energy is done through numerical FEM analysis. Results are obtained based on the material properties of the structure and the piezoelectric patches as well as the vibration spectrums obtained for the structure. This can be done at a particular frequency or over any range of frequencies.

Through modal steady state and random vibration analysis, the strain/acceleration energy content of the structure is identified and zones that could host the piezoelectric material are pin-pointed based on different possible criteria. Impact of the integration of the new harvesting material on the local strains is also known. The output is available in terms of acceleration, strain and voltage levels at the level of the piezoelectric material.

This technique can also be used to identify the best locations for vibration damping through extraction of strain energy (direct coupling) or acceleration (indirect coupling).

SUJECT DESCRIPTORS*

Subject descriptors codes	7	99	373	378	565

CURRENT STAGE OF DEVELOPMENT

Current stage of development	
Scientific and/or Technical knowledge (Basic research)	
Guidelines, methodologies, technical drawings	
Software code	
Experimental development stage (laboratory prototype)	X
Prototype/demonstrator available for testing	
Results of demonstration trials available	
Other (please specify.):	

INTELLECTUAL PROPERTY RIGHTS

Type of IPR	
Patent applied for	
Patent granted	
Patent search carried out	
Licence agreement(s) reached	
Partnership / other contractual agreement(s)	
Exclusive rights	
Registered design	
Trademark applications	
Copyrights registered	
Secret know-how	
Other - please specify :	

MARKET APPLICATION SECTORS

Market application sectors	29	35.2	35.3		
-----------------------------------	----	------	------	--	--

COLLABORATIONS SOUGHT*

Kind of collaboration					
R&D	Further research or development		FIN	Financial support	
LIC	Licence agreement		VC	Venture capital/spin-off funding	
MAN	Manufacturing agreement		PPP	Private-public partnership	
MKT	Marketing agreement/Franchising		INFO	Information exchange	X
JV	Joint venture		CONS	Available for consultancy	X
			Other	(please specify)	

POTENTIAL OFFERED FOR FURTHER DISSEMINATION AND USE

Use of finite element tools and adequate pre- and post-processing methods to evaluate the output in terms of energy levels obtained with piezoelectric material coupled onto a structure. Effort and time reduction in pre-design phase on autonomous systems and so-called "smart" structures.

PROFILE OF ADDITIONAL PARTNER(S) FOR FURTHER DISSEMINATION AND USE

Companies requiring evaluation of structural vibrations for identification of high energy content zones in order to damp or harvest energy using piezoelectric materials

No. & TITLE OF RESULT

No*.	Self-descriptive title of the result*
5	Wireless network platform based on Zigbee standard compatible with autonomous or low powered sensors network

CONTACT PERSON(S) FOR THIS RESULT

Title, First name and Family name*	Pr. Denis FLANDRE
Position	Professor
Organisation*	UCL
Address	Place du Levan, 3 1348 Louvain la Neuve - Belgium
Telephone	+32 10 47 8135
Fax	+32.10.47.2598
E-mail*	Denis.flandre@uclouvain.be
URL	http://www.dice.ucl.ac.be/~flandre/
Specific Result URL	-

SUMMARY*

In the context of ADVICE project, UCL has developed a star-mesh wireless network system based on Zigbee protocol standard and communicates on peer-to-peer and polling scenarios. The developed hardware for communication is a small electronic board (40x40 mm) and based on system-on-chip from Texas Instrument, a software managing the wireless communication network and power was been developed at all level of the network, this software is flexible with a larges sectors and applications need low power or self power systems.

The obtained results from testing the system under ADVICE project prove good performances for low powered system and compatible with others developed systems by ADVICE partners.

As low powered communication systems is one of major recent scientific researches, the reached objective of the system encourages to exploiting results for others applications and collaboration on future researches to improve the performance of the system.

SUJECT DESCRIPTORS*

Subject descriptors codes	7	192	199	679	
----------------------------------	---	-----	-----	-----	--

CURRENT STAGE OF DEVELOPMENT

Current stage of development	
Scientific and/or Technical knowledge (Basic research)	X
Guidelines, methodologies, technical drawings	X
Software code	X
Experimental development stage (laboratory prototype)	X
Prototype/demonstrator available for testing	
Results of demonstration trials available	
Other (please specify.):	

INTELLECTUAL PROPERTY RIGHTS

Type of IPR	
Patent applied for	
Patent granted	
Patent search carried out	
Licence agreement(s) reached	X
Partnership / other contractual agreement(s)	X
Exclusive rights	
Registered design	
Trademark applications	
Copyrights registered	
Secret know-how	X
Other - please specify :	

MARKET APPLICATION SECTORS

Market application sectors	62	64	73.I	
-----------------------------------	----	----	------	--

COLLABORATIONS SOUGHT*

Kind of collaboration					
R&D	Further research or development	X	FIN	Financial support	
LIC	Licence agreement		VC	Venture capital/spin-off funding	
MAN	Manufacturing agreement		PPP	Private-public partnership	
MKT	Marketing agreement/Franchising		INFO	Information exchange	X
JV	Joint venture		CONS	Available for consultancy	
			Other	(please specify)	

POTENTIAL OFFERED FOR FURTHER DISSEMINATION AND USE

The obtained results as show performances of low power wireless communication system can be exploited for different application fields and sectors. The system can be tested or developed with others power sources than structural vibrations, its also compatible with wireless communication systems need long battery life.

PROFILE OF ADDITIONAL PARTNER(S) FOR FURTHER DISSEMINATION AND USE

Developed low power communication platform look for partners to research for developing harvesting energy and enlarging field application of the system.

ANNEX 1 : FP6 EC programmes

FP6-AEROSPACE
FP6-CITIZENS
FP6-COORDINATION
FP6-EURATOM-FISSION
FP6-EURATOM-FUSION
FP6-EURATOM-JRC
FP6-EURATOM-NUCHORIZ
FP6-EURATOM-NUCTECH
FP6-EURATOM-NUWASTE
FP6-EURATOM-RADPROT
FP6-FOOD
FP6-INCO
FP6-INFRASTRUCTURES
FP6-INNOVATION
FP6-IST
FP6-JRC
FP6-LIFESCIHEALTH
FP6-MOBILITY
FP6-NEST
FP6-NMP
FP6-POLICIES
FP6-SME
FP6-SOCIETY
FP6-SUPPORT
FP6-SUSTDEV

ANNEX 2: SUBJECT DESCRIPTOR CODES

1	ACARIANS	36	ANIMAL PRODUCTS
2	ACCIDENTOLOGY	37	ANTHROPOGENIC IMPACT ON ECOSYSTEMS
3	ACCOUNTING	38	ANTHROPOLOGY
4	ACOUSTICS	39	ANTIBIOTICS
5	ADMINISTRATIVE SCIENCES, ADMINISTRATION	40	ANTICANCER THERAPIES
6	ADULT EDUCATION, PERMANENT EDUCATION	41	ANTI-FRAUD
7	AERONAUTICS	42	APPLIED MATHEMATICS
8	AGEING	43	APPLIED PHYSICS
9	AGRICULTURAL CHEMISTRY	44	AQUACULTURE, AQUACULTURE TECHNOLOGY
10	AGRICULTURAL ECONOMICS	45	ARCHIVISTICS/DOCUMENTATION/TECHNICAL DOCUMENTATION
11	AGRICULTURAL ENGINEERING/TECHNOLOGY	46	ARCTIC ENVIRONMENT
12	AGRICULTURAL MARKETING/TRADE	47	ARTIFICIAL INTELLIGENCE
13	AGRICULTURAL PRODUCTION SYSTEMS	48	ARTS
14	AGRICULTURAL SCIENCES, AGRICULTURE	49	ASSESSMENT AND MANAGEMENT OF LIVING RESOURCES
15	AGRI-FOOD, AGRI-ENVIRONMENT	50	ASTRONOMY
16	AGRONOMY	51	ASTROPHYSICS/PLANETARY GEOLOGY
17	AIR TRAFFIC CONTROL OPERATIONS/PROCEDURES/SLOT ALLOCATION	52	ATOMIC AND MOLECULAR PHYSICS
18	AIR TRAFFIC MANAGEMENT/FLOW MANAGEMENT	53	AUDIOVISUAL COMMUNICATION
19	AIR TRANSPORT TECHNOLOGY	54	AUTOMATION, ROBOTIC CONTROL SYSTEMS
20	AIRCRAFT	55	BACTERIOLOGY
21	AIRPORT OPERATIONS/PROCEDURES	56	BANKING
22	ALGAE	57	BENCHMARKING TECHNIQUES
23	ALGEBRA	58	BIOASSAYS
24	ALGEBRAIC TOPOLOGY	59	BIOCATALYSTS
25	ALGORITHMS AND COMPLEXITY	60	BIOCHEMICAL TECHNOLOGY
26	ALLERGOLOGY	61	BIOCHEMISTRY, METABOLISM
27	ALTERNATIVE PROPULSION SYSTEMS	62	BIOCOMPUTING, MEDICAL INFORMATICS, BIOMATHEMATICS, BIOMETRICS
28	ANALYTICAL CHEMISTRY	63	BIODEGRADATION
29	ANIMAL BANKS AND REPOSITORIES	64	BIODIVERSITY
30	ANIMAL BIOTECHNOLOGY	65	BIOFERTILIZERS
31	ANIMAL BREEDING/REPRODUCTION/NUTRITION	66	BIOGAS PRODUCTION
32	ANIMAL FEED, ANIMAL PRODUCTION	67	BIOLOGICAL COLLECTIONS: MUSEA AND RELATED INFORMATION RESOURCES
33	ANIMAL HEALTH, ANIMAL WELFARE	68	BIOLOGICAL ENGINEERING
34	ANIMAL PARASITIC DISEASES		
35	ANIMAL PHYSIOLOGY		

69	BIOLOGICAL MONITORING/RISK FACTORS AND ASSESSMENT	102	CHEMICAL TECHNOLOGY AND ENGINEERING
70	BIOLOGICAL SCIENCES, BIOLOGY	103	CHEMISTRY/HOMOGENEOUS AND HETEROGENEOUS CATALYSIS/THEORETICAL/NANOCHEMISTRY
71	BIOMASS PROCESS INTEGRATION AND ENVIRONMENTAL IMPACTS	104	CHRONOLOGY, DATATION TECHNOLOGY
72	BIOMECHANICS, BIOMEDICAL ENGINEERING	105	CIVIL ENGINEERING (INCL PAVEMENTS AND STRUCTURES)
73	BIOMEDICAL ETHICS	106	CLINICAL GENETICS, BIOLOGY
74	BIOMEDICAL SCIENCES	107	CLINICAL PHYSICS, RADIOLOGY, TOMOGRAPHY, MEDICAL INSTRUMENTATION, MEDICAL IMAGING
75	BIOMOLECULES, BIOPLASTICS, BIOPOLYMERS	108	CLINICAL RESEARCH, CLINICAL TRIALS, COMPUTERISED CLINICAL SYSTEMS
76	BIOPHYSICS, MEDICAL PHYSICS	109	COAL MINING TECHNOLOGIES
77	BIOREACTORS	110	COASTAL MORPHOLOGICAL CHANGES AND COASTAL DEFENSE MECHANISMS
78	BIOREMEDIATION	111	COASTAL ZONE ECOSYSTEMS AND MANAGEMENT
79	BIOSAFETY	112	COATS AND SURFACE TREATMENT
80	BIOSENSORS	113	COGNITIVE SCIENCE
81	BIOTECHNOLOGY, BIOENGINEERING	114	COLLOIDS
82	BIOTRANSFORMATION	115	COMBINATORIAL CHEMISTRY
83	BOREAL FOREST	116	COMBINED HEAT AND POWER SYSTEMS
84	BRAIN DEVELOPMENT	117	COMBUSTION BASICS AND EFFICIENCY
85	BRAIN THEORY, BRAIN MAPPING	118	COMMERCIAL AND INDUSTRIAL ECONOMICS
86	BROADBAND TECHNOLOGIES	119	COMMON AGRICULTURAL POLICY
87	BROADCASTING	120	COMMUNICATION ENGINEERING/TECHNOLOGY
88	BROKERAGE SERVICES	121	COMMUNICATION SCIENCES/HUMAN COMPUTER INTERACTIONS
89	BUILDING CONSTRUCTION, SHELL SUSTAINABILITY	122	COMMUNITY DEVELOPMENT, COMMUNITY STUDIES
90	BUSINESS COMMUNICATION	123	COMPANY RE-ENGINEERING/ORGANISATIONAL DEVELOPMENT
91	BUSINESS ECONOMICS/STUDIES, ORGANISATION AND PROCESSES	124	COMPOSITE MATERIALS
92	CARBOCHEMISTRY, PETROCHEMISTRY, FUELS AND EXPLOSIVES TECHNOLOGY	125	COMPUTATIONAL BIOLOGY
93	CARBOHYDRATES AND OTHER MACROMOLECULES METABOLISM	126	COMPUTATIONAL CHEMISTRY AND MODELING
94	CARBON DIOXIDE CAPTURE/STORAGE/DISPOSAL	127	COMPUTATIONAL MATHEMATICS/DISCRETE MATHEMATICS
95	CARDIOVASCULAR SYSTEM	128	COMPUTATIONAL PHYSICS
96	CARE AND HEALTH SERVICES, HELP TO THE HANDICAPPED	129	COMPUTER SCIENCE/ENGINEERING, NUMERICAL ANALYSIS, SYSTEMS, CONTROL
97	CELL COMMUNICATION	130	COMPUTER TECHNOLOGY/GRAPHICS, META COMPUTING
98	CENTRAL AND EASTERN EUROPEAN COUNTRIES		
99	CERAMIC MATERIALS AND POWDERS		
100	CERTIFICATION		
101	CHEMICAL METROLOGY		

131	COMPUTER-BASED TRAINING	162	DISEASES: RARE/CHRONIC/DEGENERATIVE, ETIOLOGIC FACTORS
132	CONDENSED MATTER: ELECTRONIC, MAGNETIC AND SUPERCONDUCTIVE PROPERTIES	163	DIVERSIFICATION IN AGRICULTURE/FORESTRY
133	CONDENSED MATTER: MECHANICAL AND THERMAL PROPERTIES	164	DNA CHIP
134	CONDENSED MATTER: OPTICAL AND DIELECTRIC PROPERTIES	165	DNA THERAPIES
135	CONDENSED MATTER: SOFT MATTER AND POLYMER PHYSICS	166	DOWNSTREAM PROCESSING
136	CONSUMER SCIENCES, CONSUMERS' RIGHTS	167	"DRILLING TECHNOLOGY; DEEP DRILLING"
137	CONTROL ENGINEERING	168	DRUG ABUSE, ADDICTION
138	COOPERATIVE WORKING	169	DRUG DISCOVERY, PROFILING, TARGETING
139	CORROSION	170	DRYLAND AND ARID ZONE ECOSYSTEMS
140	COSMOLOGY	171	EARTH OBSERVATION APPLICATIONS AND POLICY
141	CRIMINOLOGY	172	EARTH OBSERVATION TECHNOLOGY AND INFORMATION EXTRACTION
142	CROP, CROP INPUTS/MANAGEMENT/YIELD ESTIMATION	173	EARTH SCIENCE, EARTH OBSERVATION/STRATIGRAPHY/SEDIMENTARY PROCESSES
143	CULTURAL HERITAGE: PRESERVATION AND RESTORATION/CULTURAL STUDIES	174	EARTH SCIENCES FOR CLIMATE RESEARCH
144	CULTURE COLLECTIONS: MICROBIAL, CELL, TISSUE, GERMPLASM	175	ECOLOGY, ECOSYSTEMS, ECOLOGICAL EVOLUTION/DYNAMICS
145	CURRICULUM STUDIES	176	ECONOMIC AND ENVIRONMENT IMPACTS
146	CYBERNETICS	177	ECONOMIC AND SOCIAL SCIENCES
147	CYTOGENETICS	178	ECONOMICS IN AGRICULTURE/FORESTRY/RURAL DEVELOPMENT
148	CYTOLOGY, CANCEROLOGY, ONCOLOGY	179	ECONOMICS OF DEVELOPMENT/GROWTH/INNOVATION
149	DATA PROTECTION, STORAGE TECHNOLOGY, CRYPTOGRAPHY	180	ECONOMICS, ECONOMIC PLANNING
150	DATABASES, DATABASE MANAGEMENT, DATA MINING	181	ECOSYSTEM RESEARCH AND CONSERVATION
151	DECENTRALISED GENERATION OF ELECTRICITY/HEAT	182	ECOTOXICOLOGY
152	DECISION SUPPORT TOOLS	183	EDUCATION AND TRAINING, LIFELONG LEARNING, REMOTE LEARNING
153	DEEP WATER EXPLOITATION	184	EDUCATIONAL MULTIMEDIA
154	DEMOGRAPHY	185	EDUCATIONAL SCIENCES
155	DESIGN, DESIGN ENGINEERING	186	ELECTRICAL ENGINEERING/TECHNOLOGY
156	DEVELOPMENT OF CLEAN FUELS FOR TRANSPORT	187	ELECTROMAGNETISM
157	DEVELOPMENT POLICIES AND STUDIES	188	ELECTRONIC COMMERCE, ELECTRONIC PAYMENT, ELECTRONIC SIGNATURE
158	DEVELOPMENT TECHNOLOGY, ANIMAL GROWTH, ONTOLOGY, EMBRYOLOGY	189	ELECTRONIC DATA INTERCHANGE
159	DIAGNOSTICS, DIAGNOSIS	190	ELECTRONIC HEALTH RECORDS
160	DIGITAL SYSTEMS, DIGITAL REPRESENTATION	191	ELECTRONIC PUBLISHING, AUTHORING TOOLS
161	DISABILITIES, HANDICAPS AND HANDICAPPED	192	ELECTRONICS, ELECTRONIC ENGINEERING

193	EMERGENCY MANAGEMENT	226	FERMENTATION
194	EMISSION	227	FINANCIAL SCIENCE, FINANCE
195	EMPLOYMENT STUDIES	228	FINE CHEMICALS, DYES AND INKS
196	ENDOCRINOLOGY, SECRETING SYSTEMS, DIABETOLOGY	229	FISH/FISHERIES
197	ENERGY AND CLIMATE CHANGE	230	FISHING METHODOLOGIES/SELECTIVITY
198	ENERGY CONVERSION PROCESSES OR CYCLES/CONVERSION FROM COAL	231	FOOD AND DRINK TECHNOLOGY
199	ENERGY MANAGEMENT SYSTEM	232	FOOD CHEMISTRY, FOOD INGREDIENTS
200	ENERGY MARKET ANALYSIS	233	FOOD MICROBIOLOGY
201	ENERGY PRODUCTION FROM BIOMASS / WASTE	234	FOOD PROCESSING/PACKAGING
202	ENERGY RESEARCH/RTD POLICY	235	FOOD QUALITY MANAGEMENT/POLICY/LABELLING
203	ENERGY, RENEWABLE ENERGIES, ELECTRICITY STORAGE	236	FOOD TOXICOLOGY
204	ENGINEERING, CONCURRENT ENGINEERING	237	FOREST ECOSYSTEMS
205	ENTOMOLOGY, PLANT PARASITOLOGY	238	FOREST GENETICS
206	ENTREPRENEURSHIP, SPIN OFFS, NEW TECHNOLOGY BASED BUSINESS	239	FOREST PHYSIOLOGY AND PATHOLOGY
207	ENVIRONMENT, ENVIRONMENTAL SCIENCE	240	FOREST POLICY, FOREST MANAGEMENT
208	ENVIRONMENTAL ECONOMICS/NATURAL RESOURCES ECONOMICS	241	FOREST PROTECTION
209	ENVIRONMENTAL HEALTH	242	FOREST SCIENCES
210	ENVIRONMENTAL IMPACTS/INTERACTIONS	243	FORMAL SAFETY AND ENVIRONMENTAL ASSESSMENT
211	ENVIRONMENTAL INDICATORS/MONITORING/RISK ASSESSMENT	244	FREIGHT TRANSPORT
212	ENVIRONMENTAL LAW/TREATIES/POLICY	245	FUEL CELLS
213	ENVIRONMENTAL TECHNOLOGY/ENGINEERING, POLLUTION CONTROL	246	FUELS: ALTERNATIVE FUELS IN TRANSPORTS
214	EPIDEMIOLOGY	247	FUNCTIONAL FOODS
215	ERGONOMICS	248	FUNGI
216	EROSION	249	FUTURE AND EMERGING TECHNOLOGIES
217	EUROPEAN INTEGRATION	250	GAS CONVERSION
218	EUROPEAN LAW	251	GAS TURBINES FOR ENERGY CONVERSION
219	EUROPEAN STUDIES	252	GASES, FLUID DYNAMICS, PLASMAS/ELECTRIC DISCHARGES
220	EVALUATION	253	GASTRO-ENTEROLOGY
221	EXPLOITATION OF RESEARCH RESULTS	254	GENDER ISSUES, GENDER STUDIES
222	EXTENSIFICATION	255	GENE THERAPY
223	EXTERNALITIES	256	GENERAL PATHOLOGY, PATHOLOGICAL ANATOMY
224	FARMHOUSE CONSTRUCTION	257	GENETIC COMPARATIVE ANALYSIS
225	FARMING SYSTEMS	258	GENETIC ENGINEERING
		259	GENETIC MAPPING, GENE SEQUENCE
		260	GENETIC RESISTANCE
		261	GENETIC SELECTION
		262	GENETICALLY MODIFIED ORGANISMS
		263	GENETICS

264	GENOMES, GENOMICS	298	HUMAN FACTORS IN TRANSPORT
265	GEOGRAPHIC INFORMATION SYSTEMS	299	HUMAN GENETICS
266	GEOGRAPHY	300	HUMAN RIGHTS
267	GEOLOGICAL ENGINEERING/GEOTECHNICS	301	HUMAN SCIENCES, HUMANITIES
268	GEOMETRY/TOPOLOGY	302	HVAC SYSTEMS AND MANAGEMENT
269	GEOPHYSICS, PHYSICAL OCEANOGRAPHY, METEOROLOGY, GEOCHEMISTRY, TECTONICS	303	HYBRID AND ELECTRIC VEHICLES
270	GERONTOLOGY AND GERIATRICS	304	HYDROBIOLOGY, MARINE BIOLOGY, AQUATIC ECOLOGY, LIMMOLOGY
271	GLOBAL CHANGE: BIOGEOCHEMICAL AND HYDROLOGICAL CYCLES	305	HYDROCARBONS EXPLORATION AND PRODUCTION
272	GLOBAL CHANGE: CLIMATE CHANGE	306	HYDROELECTRICITY/SMALL HYDRO/HYDROPOWER
273	GLOBAL CHANGE: HUMAN HEALTH	307	HYDROGEN
274	GLOBAL CHANGE: LAND COVER AND DEGRADATION	308	HYDROGEOLOGY, GEOGRAPHICAL AND GEOLOGICAL ENGINEERING
275	GLOBAL CHANGE: OZONE AND ATMOSPHERIC COMPOSITION	309	IDENTIFICATION SYSTEMS
276	GLOBAL CYCLES OF ENERGY AND MATTER	310	IMAGING, IMAGE PROCESSING
277	GREEN TECHNOLOGIES/CHEMICALS	311	IMMUNOLOGY, IMMUNOTHERAPY, IMMUNOASSAYS
278	GRID CONNECTION	312	IN VITRO TESTING/TRIAL METHODS
279	HAZARDS: INDUSTRIAL	313	INDUSTRIAL ENGINEERING
280	HAZARDS: NATURAL	314	INDUSTRIAL POLICY/RELATIONS
281	HEALTH AND POPULATION, HEALTH EDUCATION	315	INDUSTRIAL PSYCHOLOGY/SOCIOLOGY
282	HEALTH FINANCING / ECONOMICS	316	INDUSTRIAL TECHNOLOGY/ECONOMICS
283	HEALTH RISK EVALUATION	317	INFECTIONS
284	HEALTH SCIENCES/POLICIES/LAW	318	INFORMATICS
285	HEALTH SERVICE MANAGEMENT	319	INFORMATICS LAW
286	HEALTH SYSTEMS RESEARCH	320	INFORMATION MANAGEMENT
287	HEALTH, HEALTH PHYSICS	321	INFORMATION TECHNOLOGY/SCIENCE
288	HETEROGENEOUS CATALYSIS	322	INFRASTRUCTURE MANAGEMENT
289	HIGH CONTAINMENT, HIGHT CONTAINMENT FACILITIES	323	INLAND NAVIGATION
290	HIGH FREQUENCY TECHNOLOGY, MICROWAVES	324	INNOVATION ASSISTANCE
291	HIGH-THROUGHPUT SCREENING	325	INNOVATION FINANCE
292	HISTOLOGY, CYTOCHEMISTRY, HISTOCHEMISTRY, TISSUE CULTURE	326	INNOVATION MONITORING
293	HISTORY	327	INNOVATION POLICY/STUDIES
294	HISTORY AND PHILOSOPHY OF SCIENCE AND MEDICINE	328	INNOVATION TRAINING
295	HOME SYSTEMS	329	INORGANIC CHEMISTRY
296	HORMONES	330	INSECTS
297	HORTICULTURE, ORNAMENTAL PLANTS	331	INSTRUMENTATION TECHNOLOGY
		332	INTANGIBLE INVESTMENTS
		333	INTEGRATED ENVIRONMENTAL ASSESSMENT
		334	INTEGRATED GLOBAL SAFETY

335	INTEGRATION OF RENEWABLE ENERGY SYSTEMS	369	MARINE: OCEANOGRAPHY (PHYSICAL AND OPERATIONAL)
336	INTELLECTUAL PROPERTY	370	MARITIME SAFETY
337	INTELLIGENT AGENTS	371	MARKET ANALYSIS/ECONOMICS/QUANTITATIVE METHODS
338	INTELLIGENT VEHICLES AND WATERBORNE TRANSPORT SYSTEMS	372	MARKET STUDY, MARKETING
339	INTERMODAL TRANSPORT	373	MATERIALS TECHNOLOGY/ENGINEERING
340	INTERNATIONAL COMMERCE/ECONOMICS	374	MATHEMATICAL ANALYSIS/PARTIAL DIFFERENTIAL EQUATIONS
341	INTERNATIONAL TREATIES / MULTILATERAL AGREEMENTS	375	MATHEMATICAL LOGIC: SET THEORY, COMBINATORICS/SEMANTICS
342	INTERNET TECHNOLOGIES	376	MATHEMATICAL PHYSICS
343	INVERTEBRATES	377	MATHEMATICS
344	JOURNALISM	378	MECHANICAL ENGINEERING, HYDRAULICS, VIBRATION AND ACOUSTIC ENGINEERING
345	KNOWLEDGE ENGINEERING	379	MEDIA STUDIES/LAW/MASS COMMUNICATIONS
346	LABOUR MARKET STUDIES/ECONOMICS	380	MEDICAL ANTHROPOLOGY
347	LAND USE PLANNING/LANDSCAPE/LANDSCAPE ARCHITECTURE	381	MEDICAL SCIENCES/RESEARCH
348	LANGUAGE SCIENCES/ENGINEERING/TECHNOLOGY, LINGUISTICS	382	MEDICAL TECHNOLOGY
349	LARGE SCALE GENERATION OF ELECTRICITY/HEAT	383	MEDICINAL CHEMISTRY
350	LASER TECHNOLOGY	384	MEDICINE (HUMAN AND VERTEBRATES)
351	LAW: INTERNATIONAL / PRIVATE / PUBLIC	385	MEMBRANE TECHNOLOGY
352	LEARNING MECHANISMS	386	MENTAL STRESS
353	LIBRARY SCIENCE/SYSTEMS	387	METABOLIC REGULATION AND SIGNAL TRANSDUCTION
354	LIFE CYCLE MANAGEMENT	388	METAL TECHNOLOGY AND METAL PRODUCTS
355	LIPIDS, STEROIDS, MEMBRANES	389	METALLURGY
356	LIQUID BIOFUELS	390	METROLOGY, PHYSICAL INSTRUMENTATION
357	LOGISTICS	391	MICROBIAL BIOTECHNOLOGY, MICROBIAL MODELLING
358	LOW INPUT PRODUCTION	392	MICROBIAL SYSTEMATICS/DIVERSITY
359	MACROECONOMICS (INCL. MONETARY ECONOMICS)	393	MICROBIOLOGY
360	MACROMOLECULAR CHEMISTRY/NEW MATERIAL/SUPRAMOLECULAR STRUCTURES	394	MICROECONOMICS (THEORETICAL AND APPLIED)
361	MACROSOCIOLOGY	395	MICROELECTRONICS
362	MAINTENANCE MANAGEMENT	396	MICROENGINEERING, MICROMACHINING
363	MANAGEMENT OF ENTERPRISES	397	MICROSYSTEMS
364	MANAGEMENT OF URBAN AREAS	398	MINING
365	MANAGEMENT STUDIES	399	MOBILE COMMUNICATIONS
366	MARINE ECOSYSTEMS	400	MODELLING/MODELLING TOOLS, 3-D MODELLING
367	MARINE SCIENCES/MARITIME STUDIES	401	MOLECULAR BIOLOGY
368	MARINE: INSTRUMENTATION AND UNDERWATER TECHNOLOGY		

402	MOLECULAR BIOPHYSICS	438	NUCLEAR PHYSICS
403	MOLECULAR DESIGN, DE NOVO DESIGN	439	NUCLEIC ACID METABOLISM
404	MOLECULAR EVOLUTION	440	NUCLEIC ACIDS, POLYNUCLEOTIDES, PROTEIN SYNTHESIS
405	MOLECULAR GENETICS	441	NUMBER THEORY, FIELD THEORY, ALGEBRAIC GEOMETRY, GROUP THEORY
406	MOLECULAR MARKERS AND RECOGNITION	442	NUTRITION
407	MONOCLONAL ANTIBODIES	443	OBSERVATION SYSTEMS / CAPACITY / DATASETS / INDICATORS
408	MOTHER AND CHILD HEALTH	444	OCCUPATIONAL HEALTH, INDUSTRIAL MEDICINE
409	MOTORS AND PROPULSION SYSTEMS	445	OCEAN / ENERGY
410	MOUNTAIN AND HIGHLAND ECOSYSTEMS	446	ODONTOLOGY, STOMATOLOGY
411	MULTIMEDIA	447	OFFSHORE TECHNOLOGY, SOIL MECHANICS, HYDRAULIC ENGINEERING
412	MULTISENSORY TECHNOLOGY, MULTI- SENSING	448	ON-LINE INFORMATION SERVICES, ON- LINE DEMOCRACY, ON-LINE BUSINESS
413	MUSEUM SCIENCE	449	OPERATIONS RESEARCH, ACTUARIAL MATHEMATICS
414	MYCOLOGY	450	OPTICAL MATERIALS
415	NANOBIO TECHNOLOGY	451	OPTICS
416	NANOFABRICATION, NANOTECHNOLOGY	452	OPTRONICS
417	NARROW BAND TECHNOLOGIES	453	ORGANIC CHEMISTRY
418	NATURAL GAS	454	ORGANIC FARMING
419	NATURAL HISTORY OF DISEASES	455	ORGANIC WASTE
420	NATURAL OILS, FATS AND WAXES	456	ORGANOMETALLIC CHEMISTRY
421	NATURAL RESOURCES EXPLORATION	457	ORPHAN DRUGS
422	NATURAL SCIENCES	458	OTHER RENEWABLE ENERGY OPTIONS
423	NEMATODS	459	OTORHINOLARYNGOLOGY, AUDIOLOGY, AUDITIVE SYSTEM AND SPEECH
424	NETWORK TECHNOLOGY, NETWORK SECURITY	460	PALEOCLIMATOLOGY
425	NETWORKED ORGANISATIONS	461	PALEONTOLOGY/PALEOECOLOGY
426	NEUROBIOLOGY, NEUROCHEMISTRY, NEUROLOGY, NEUROPSYCHOLOGY, NEUROPHYSIOLOGY	462	PAPER TECHNOLOGY, RECYCLING
427	NEUROINFORMATICS	463	PARASITOLOGY (HUMAN AND ANIMAL)
428	NEUTRON PHYSICS	464	PARTICLE PHYSICS/FIELDS THEORY
429	NEW MEANS OF TRANSPORT	465	PASSENGER TRANSPORT
430	NITROGEN FIXATION	466	PATENTS, COPYRIGHTS, TRADEMARKS
431	NOISE AND VIBRATIONS	467	PATHOLOGY
432	NON-COMMUNICABLE DISEASES	468	PATHOPHYSIOLOGY
433	NON-LINEAR DYNAMICS AND CHAOS THEORY	469	PERIPHERALS TECHNOLOGIES (MASS DATA STORAGE, DISPLAY TECHNOLOGIES)
434	NON-METALLIC MINERAL TECHNOLOGY	470	PERI-URBAN AGRICULTURE
435	NUCLEAR CHEMISTRY	471	PESTICIDES, BIOPESTICIDES
436	NUCLEAR ENGINEERING AND TECHNOLOGY		
437	NUCLEAR MEDICINE, RADIOBIOLOGY		

472	PETROCHEMISTRY, PETROLEUM ENGINEERING	505	PRION DISEASES
473	PETROLOGY, MINERALOGY, GEOCHEMISTRY	506	PROBABILITY THEORY
474	PHARMACEUTICALS AND RELATED TECHNOLOGIES	507	PROCESS EFFICIENCY
475	PHARMACOLOGICAL SCIENCES, PHARMACOGNOSY, TOXICOLOGY	508	PROCESS ENGINEERING
476	PHOTONIC NETWORKS	509	PRODUCTION TECHNOLOGY
477	PHOTOVOLTAIC SYSTEMS, CELLS AND MODULES MANUFACTURING, TECHNOLOGY DEVELOPMENT	510	PROGRAMMING/INFORMATION SYSTEMS
478	PHYSICAL CHEMISTRY/SOFT MATTER	511	PROJECT ENGINEERING
479	PHYSICAL GEOGRAPHY, CARTOGRAPHY, CLIMATOLOGY	512	PROTEINS, ENZYMOLOGY, PROTEIN ENGINEERING
480	PHYSICAL MEDICINE, KINESITHERAPY, REVALIDATION, REHABILITATION	513	PROTEOMES, PROTEOMICS
481	PHYSICAL SCIENCES	514	PSYCHIATRY, MEDICAL PSYCHOLOGY, PSYCHOSOMATICS
482	PHYSICAL STRESS	515	PSYCHOLOGICAL SCIENCES, PSYCHOLOGY
483	PHYSICS OF FLUIDS	516	PUBLIC ADMINISTRATION
484	PHYSIOLOGICAL DISORDERS	517	PUBLIC HEALTH
485	PHYSIOLOGY	518	PUBLIC PERCEPTION, PUBLIC RELATIONS
486	PHYTOREMEDIATION	519	PUBLIC POLICY STUDIES
487	PHYTOTECHNOLOGY, PHYTOPATHOLOGY, CROP PROTECTION	520	PUBLISHING
488	PIPELINE TECHNOLOGY	521	PULP TECHNOLOGY
489	PLANT AND ASSOCIATED MICROORGANISM BIOTECHNOLOGY	522	QUALITY, QUALITY CONTROL, TRACEABILITY
490	PLANT BIOCHEMISTRY	523	QUANTUM INFORMATION PHYSICS
491	PLANT BIOLOGY	524	QUANTUM MECHANICS
492	PLANT GENETICS/SELECTION/BREEDING	525	QUANTUM TECHNOLOGY
493	PLANT HEALTH/PROTECTION	526	R&D POLICY AND PROGRAMME EVALUATION AND IMPACT ASSESSMENT
494	PLANT INPUTS/NUTRITION/PRODUCTION	527	RADIODIAGNOSTICS, RADATION BIOLOGY
495	PLANT PHYSIOLOGY	528	RADIOECOLOGY
496	PLANT PRODUCTS	529	RAILWAY TRANSPORT TECHNOLOGY
497	POLITICAL SCIENCES/THEORY/ECONOMY/COMPARATIVE POLITICS	530	REACTION MECHANISMS AND DYNAMICS
498	POLYMER TECHNOLOGY, BIOPOLYMERS	531	REACTOR SAFETY
499	POPULATION GENETICS	532	REFERENCE MATERIALS/METHODS
500	PORT MANAGEMENT	533	REFRIGERATION AND COOLING
501	POSITIONING AND GUIDANCE SYSTEMS	534	REGIONAL ECONOMICS/STUDIES/DEVELOPMENT
502	POST HARVEST TREATMENT - FOOD	535	REHABILITATION SYSTEMS
503	POST HARVEST TREATMENT - NON-FOOD	536	REMOTE SENSING
504	PRECISION ENGINEERING	537	REPRODUCTIVE HEALTH
		538	REPRODUCTIVE MECHANISMS
		539	RESEARCH METHODOLOGY IN SCIENCE
		540	RESEARCH NETWORKING
		541	RESEARCH POLICY

542	RESERVOIR CHARACTERISATION AND MONITORING	576	SOCIO-ECONOMICAL IMPACTS IN AGRICULTURE/FORESTRY/RURAL DEVELOPMENT
543	RESIDUES	577	SOCIO-ECONOMICS
544	RESPIRATORY SYSTEM	578	SOCIOLOGY
545	RE-STRUCTURING OF PUBLIC ADMINISTRATIONS	579	SOFTWARE ENGINEERING, MIDDLEWARE, GROUPWARE
546	ROAD SAFETY	580	SOIL SCIENCE, AGRICULTURAL HYDROLOGY, WATER PROCESSES
547	ROAD TRANSPORT TECHNOLOGY	581	SOLAR CONCENTRATING TECHNOLOGIES AND APPLICATIONS
548	RTD SYSTEMS AND POLICIES AND THEIR INTERACTION WITH OTHER RELATED POLICIES	582	SOLID STATE PHYSICS
549	RURAL DEVELOPMENT, RURAL SOCIOLOGY AND SOCIO-ECONOMICS	583	SOUND ENGINEERING/TECHNOLOGY
550	SAFETY TECHNOLOGY	584	SPACE TECHNOLOGY
551	SAMPLE BANKS	585	SPATIAL INTEGRATION IN BUILT ENVIRONMENT
552	SATELLITE (TECHNOLOGY, SYSTEMS, POSITIONING, COMMUNICATION)	586	SPEECH COMMUNICATION
553	SCIENCE AND TECHNOLOGY INDICATORS	587	SPEECH PROCESSING/TECHNOLOGY
554	SCIENCE POLICY	588	STANDARDISATION, STANDARDISATION OF NEW TECHNOLOGIES
555	SCIENCE, TECHNOLOGY AND THE MEDIA	589	STATISTICAL PHYSICS
556	SEA FOOD	590	STATISTICS
557	SEARCH AND RESCUE	591	STRUCTURAL BIOLOGY/DETERMINATION/FUNCTION
558	SECURITY SYSTEMS	592	SUPERCONDUCTORS
559	SEMICONDUCTOR PHYSICS AND TECHNOLOGIES	593	SURFACE CHEMISTRY
560	SENSORY SCIENCE, SENSORS, INSTRUMENTATION	594	SURFACE PHYSICS
561	SEROLOGY AND TRANSPLANTATION	595	SURVEILLANCE
562	SET ASIDE	596	SURVEYING
563	SIGNAL PROCESSING	597	SYNTHESIS AND NEW MOLECULES
564	SILVICULTURE, FORESTRY, FOREST TECHNOLOGY	598	SYSTEMS ANALYSIS AND MODELS DEVELOPMENT
565	SIMULATION, SIMULATION ENGINEERING	599	SYSTEMS DESIGN/THEORY
566	SIMULATOR TRAINING	600	SYSTEMS ENGINEERING
567	SKELETON, MUSCLE SYSTEM, RHEUMATOLOGY, LOCOMOTION	601	SYSTEMS, CONTROL, MODELLING, AND NEURAL NETWORKS
568	SMART CARDS	602	TECHNOLOGICAL SCIENCES
569	SOCIAL ECONOMICS	603	TECHNOLOGY ACCEPTABILITY
570	SOCIAL LAW	604	TECHNOLOGY ASSESSMENT AND FORESIGHT
571	SOCIAL MEDICINE	605	TECHNOLOGY EVALUATION/MANAGEMENT
572	SOCIAL SHAPING OF TECHNOLOGY	606	TECHNOLOGY POLICY
573	SOCIETAL BEHAVIOUR	607	TECHNOLOGY TRANSFER
574	SOCIO-ECONOMIC ASPECTS OF ENVIRONMENTAL CHANGE	608	TECHNOLOGY WATCH/VALIDATION
575	SOCIO-ECONOMIC RESEARCH		

609 TELECOMMUNICATION ENGINEERING/TECHNOLOGY	645 URBAN GOVERNANCE AND DECISION MAKING
610 TELESERVICES, TELE-WORKING, TELE- PAYMENT, TELE-MEDICINE	646 URBAN QUALITY OF LIFE
611 TESTING, CONFORMANCE TESTING	647 URBAN SOCIOLOGY
612 TEXTILES TECHNOLOGY	648 URBAN TRANSPORT
613 THERAPEUTIC SUBSTANCES	649 URBAN: SUSTAINABLE CITIES AND RATIONAL RESOURCE MANAGEMENT
614 THERMAL ENGINEERING, APPLIED THERMODYNAMICS	650 URBAN: TECHNOLOGIES FOR THE BUILT ENVIRONMENT
615 THERMODYNAMICS	651 UROLOGY, NEPHROLOGY
616 TIMBER ENGINEERING	652 USER CENTRED DESIGN, USABILITY
617 TISSUE BANKS/ENGINEERING	653 USER MODELLING
618 TOTAL QUALITY MANAGEMENT	654 VACCINES
619 TOWN AND COUNTRY PLANNING	655 VACUUM/HIGH VACUUM TECHNOLOGY
620 TOXICITY AND TOXINOLOGY	656 VEHICLE TECHNOLOGY
621 TRACTION/PROPULSION SYSTEMS	657 VENTURE CAPITAL
622 TRAFFIC CONTROL SYSTEMS	658 VESSEL TRAFFIC MANAGEMENT
623 TRAFFIC ENGINEERING/INFRASTRUCTURE/MANAGEMENT SYSTEMS	659 VETERINARY MEDICINE
624 TRANSACTION SYSTEMS	660 VIRTUAL ORGANISATIONS
625 TRANSGENE EXPRESSION	661 VIRTUAL REALITY
626 TRANSGENIC CROP PLANT	662 VIRUS, VIROLOGY
627 TRANSHIPMENT SYSTEMS	663 VULCANOLOGY/SEISMOLOGY
628 TRANSPORT DEMAND MANAGEMENT	664 WASTE BIOTREATMENT
629 TRANSPORT ECONOMICS	665 WASTE MANAGEMENT/RECYCLING
630 TRANSPORT INFORMATION SYSTEMS, FLEET MANAGEMENT	666 WATER RESOURCE MANAGEMENT/ENGINEERING
631 TRANSPORT INFRASTRUCTURE/MANAGEMENT SERVICES	667 WATER TRANSPORT TECHNOLOGY, SHIPBUILDING
632 TRANSPORT MODELLING/SCENARIOS	668 WATER: FRESH WATER ECOSYSTEMS
633 TRANSPORT OF GAS AND LIQUID FUELS	669 WATER: HYDROLOGY
634 TRANSPORT POLICY/LAW	670 WATER: MONITORING / QUALITY / TREATMENT
635 TRANSPORT SAFETY/SECURITY	671 WATER: RATIONAL AND EFFICIENT USE
636 TRANSPORT TECHNOLOGY/ENGINEERING	672 WATERBORNE TRANSPORT
637 TRANSPORT TELEMATICS	673 WAVE/TIDAL ENERGY
638 TRANSPORT, TRANSMISSION AND DISTRIBUTION OF ELECTRICITY	674 WEEDS
639 TROPICAL AGRICULTURE	675 WELFARE STUDIES
640 TROPICAL ECOSYSTEMS	676 WETLAND ECOSYSTEMS
641 TROPICAL FORESTRY	677 WIND ENERGY MANUFACTURING/TECHNOLOGIES
642 TROPICAL MEDICINE	678 WIND TURBINE ENVIRONMENTAL IMPACT
643 URBAN DEVELOPMENT/ECONOMICS	679 WIRELESS SYSTEMS, RADIO TECHNOLOGY
644 URBAN FORESTRY	680 WOMEN'S STUDIES

681 WOOD ENGINEERED PRODUCTS, PARTICLE
AND FIBRE BOARDS

682 WOOD PROCESSING BY MECHANICAL
MEANS

683 WORLD TRADE ORGANISATION

ANNEX 3: NACE codes for business activities

Division	Description
<i>Section A</i>	<i>Agriculture, hunting and forestry</i>
<i>01</i>	<i>Agriculture, hunting and related service activities</i>
<i>02</i>	<i>Forestry, logging and related service activities</i>
<i>Section B</i>	<i>Fishing</i>
<i>05</i>	<i>Fishing, operation of fish hatcheries and fish farms; service activities incidental to fishing</i>
<i>Section C</i>	<i>Mining and quarrying</i>
<i>10</i>	<i>Mining of coal and lignite; extraction of peat</i>
<i>11</i>	<i>Extraction of crude petroleum and natural gas; service activities incidental to oil and gas extraction, excluding surveying</i>
<i>12</i>	<i>Mining of uranium and thorium ores</i>
<i>13</i>	<i>Mining of metal ores</i>
<i>14</i>	<i>Other mining and quarrying</i>
<i>Section D</i>	<i>Manufacturing</i>
<i>15</i>	<i>Manufacture of food products and beverages</i>
<i>16</i>	<i>Manufacture of tobacco products</i>
<i>17</i>	<i>Manufacture of textiles</i>
<i>18</i>	<i>Manufacture of wearing apparel; dressing and dyeing of fur</i>
<i>19</i>	<i>Tanning and dressing of leather; manufacture of luggage, handbags, saddlery, harness and footwear</i>
<i>20</i>	<i>Manufacture of wood and of products of wood and cork, except furniture; manufacture of articles of straw and plaiting materials</i>
<i>21</i>	<i>Manufacture of pulp, paper and paper products</i>
<i>22</i>	<i>Publishing, printing and reproduction of recorded media</i>
<i>23</i>	<i>Manufacture of coke, refined petroleum products and nuclear fuel</i>
<i>24</i>	<i>Manufacture of chemicals and chemical products</i>
<i>25</i>	<i>Manufacture of rubber and plastic products</i>
<i>26</i>	<i>Manufacture of other non-metallic mineral products</i>
<i>27</i>	<i>Manufacture of basic metals</i>
<i>28</i>	<i>Manufacture of fabricated metal products, except machinery and equipment</i>
<i>29</i>	<i>Manufacture of machinery and equipment n.e.c.</i>
<i>30</i>	<i>Manufacture of office machinery and computers</i>

31	<i>Manufacture of electrical machinery and apparatus n.e.c.</i>
32	<i>Manufacture of radio, television and communication equipment and apparatus</i>
33	<i>Manufacture of medical, precision and optical instruments, watches and clocks</i>
34	<i>Manufacture of motor vehicles, trailers and semi-trailers</i>
35	<i>Manufacture of other transport equipment</i>
35.1	<i>Building and repairing of ships and boats</i>
35.2	<i>Manufacture of railway and tramway locomotives and rolling stock</i>
35.3	<i>Manufacture of aircraft and spacecraft</i>
a	<i>Manufacture of helicopter</i>
b	<i>Manufacture of aeroplanes for the transport of goods or passengers, for use by the defence forces, for sports or other purposes</i>
c1	<i>Manufacture of parts and accessories of the aircraft of this class</i>
d2	<i>Others</i>
36	<i>Manufacture of furniture; manufacturing n.e.c.</i>
37	<i>Recycling</i>
Section E	<i>Electricity, gas and water supply</i>
40	<i>Electricity, gas, steam and hot water supply</i>
41	<i>Collection, purification and distribution of water</i>
Section F	<i>Construction</i>
45	<i>Construction</i>
Section G	<i>Wholesale and retail trade; repair of motor vehicles, motorcycles and personal and household goods</i>
50	<i>Sale, maintenance and repair of motor vehicles and motorcycles; retail sale of automotive fuel</i>
51	<i>Wholesale trade and commission trade, except of motor vehicles and motorcycles</i>
52	<i>Retail trade, except of motor vehicles and motorcycles; repair of personal and household goods</i>
Section H	<i>Hotels and restaurants</i>
55	<i>Hotels and restaurants</i>
Section I	<i>Transport, storage and communication</i>

¹ Includes: major assemblies such as fuselages, wings, doors, control surfaces, landing gear, fuel tanks, nacelles, airscrews, helicopter rotors and propelled rotor blades, motors and engines of a kind typically found on aircraft, parts of turbojets and turbopropellers

² This includes: manufacture of gliders, hang-gliders, manufacture of dirigibles and balloons, manufacture of spacecraft and spacecraft launch vehicles, satellites, planetary probes, orbital stations, shuttles, manufacture of aircraft launching gear, deck arresters, etc.
manufacture of ground flying trainers However 35.3 should **exclude**: manufacture of parachutes, military ballistic missiles, ignition parts and other electrical parts for internal combustion engines, instruments used on aircraft, and air navigation systems.

60	<i>Land transport; transport via pipelines</i>
61	<i>Water transport</i>
61.1	<i>Sea and coastal water transport</i>
<i>e</i>	<i>Transport of passenger or freight over water</i>
<i>f</i>	<i>Operation of excursion, cruise or sightseeing boats</i>
<i>g</i>	<i>Operation of ferries, water taxis, etc.</i>
62	<i>Air transport</i>
<i>h</i>	<i>Transport of passenger or freight by airlines</i>
63	<i>Supporting and auxiliary transport activities; activities of travel agencies</i>
63.1	<i>Cargo handling and storage</i>
63.2	<i>Other supporting transport activities</i>
<i>i</i>	<i>Operation of terminal facilities such as harbours and piers, waterway locks etc.</i>
<i>j</i>	<i>Airport and air-traffic control activities</i>
63.3	<i>Activities of travel agencies and tour operators; tourist assistance activities n.e.c.</i>
63.4	<i>Activities of other transport agencies</i>
<i>k</i>	<i>Forwarding of freight</i>
64	<i>Post and telecommunications</i>
<i>Section J</i>	<i>Financial intermediation</i>
65	<i>Financial intermediation, except insurance and pension funding</i>
66	<i>Insurance and pension funding, except compulsory social security</i>
67	<i>Activities auxiliary to financial intermediation</i>
<i>Section K</i>	<i>Real estate, renting and business activities</i>
70	<i>Real estate activities</i>
71	<i>Renting of machinery and equipment without operator and of personal and households goods</i>
72	<i>Computer and related activities</i>
73	<i>Research and development</i>
<i>l</i>	<i>Research and experimental development on natural sciences and engineering</i>
<i>m</i>	<i>Research and experimental development on social sciences and humanities</i>
74	<i>Other business activities</i>
<i>Section L</i>	<i>Public administration and defence; compulsory social security</i>
75	<i>Public administration and defence; compulsory social security</i>
<i>Section M</i>	<i>Education</i>
80	<i>Education</i>
<i>Section N</i>	<i>Health and social work</i>

85	<i>Health and social work</i>
<i>Section O</i>	<i>Other community, social and personal service activities</i>
90	<i>Sewage and refuse disposal, sanitation and similar activities</i>
91	<i>Activities of membership organisations n.e.c.</i>
92	<i>Recreational, cultural and sporting activities</i>
93	<i>Other service activities</i>
<i>Section P</i>	<i>Private households with employed persons</i>
95	<i>Private households with employed persons</i>
<i>Section Q</i>	<i>Extra-territorial organisations and bodies</i>
99	<i>Extra-territorial organisations and bodies</i>

[End of document]